

# Simulation Environment for Object Manipulation with Soft Robots in Shared Autonomy



Devin Hunter, Fabio Stroppa, Allison. M. Okamura


Department of Mechanical Engineering, Stanford University

SURF  
STANFORD


## Introduction

We developed a virtual environment for a soft robot being designed in the CHARM Lab termed the Vine Robot and implemented an autonomous algorithm that allowed the robot to manipulate objects in its virtual space.

Much like the physical model, the virtual Vine Robot is composed of a growing manipulator with a grasping end-effector that can pick up and move objects in its virtual space.

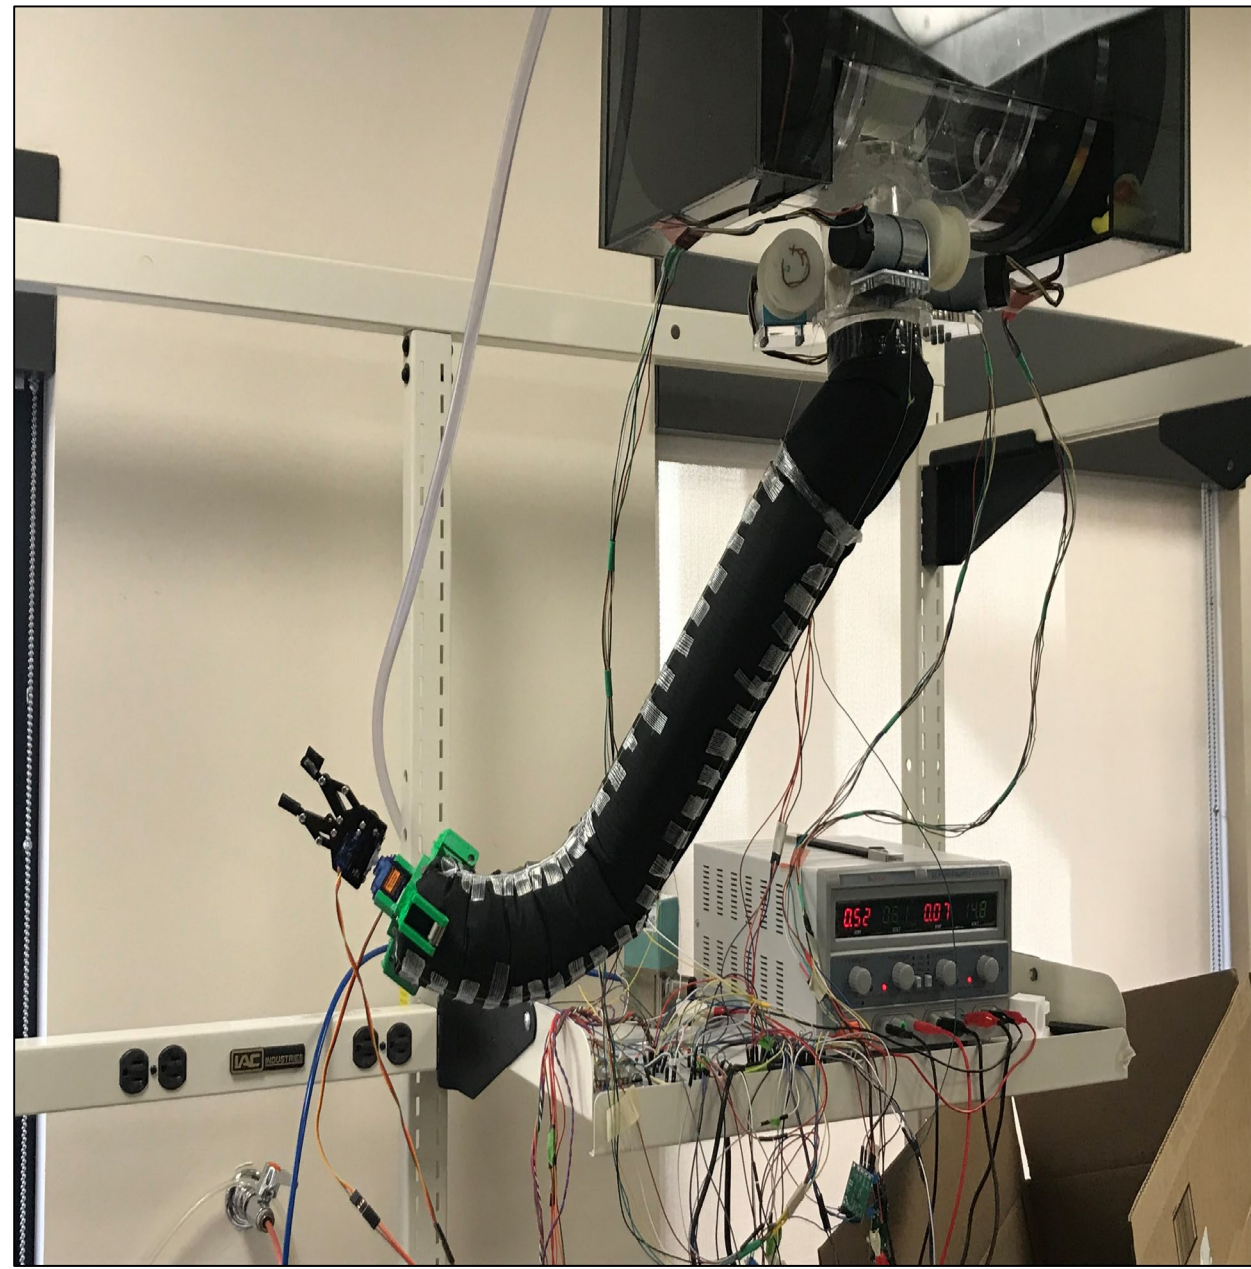


\*Physical Model of Vine Robot\*

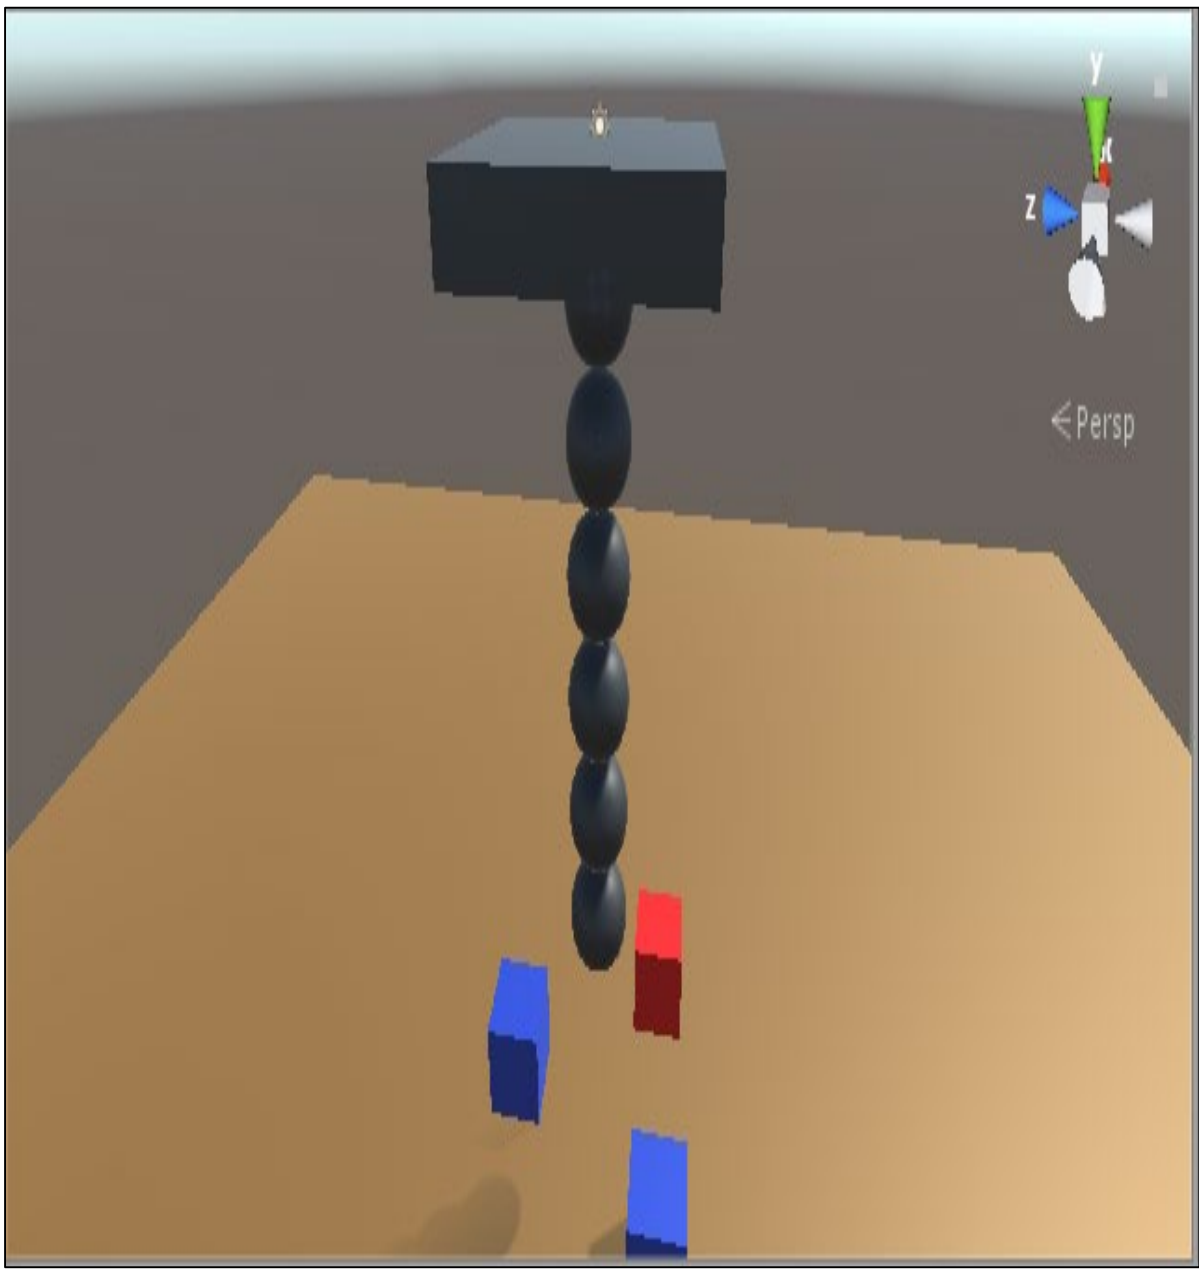

\*Virtual Model of Vine Robot\*

## Virtual Environment

This virtual model was developed in Unity – the 3D environment software used primarily by video game developers. We chose this software due to its simple, but powerful inverse kinematics toolbox that allowed us to move the end effector around its virtual space along with its realistic physics engine when the robot is manipulating objects around itself.




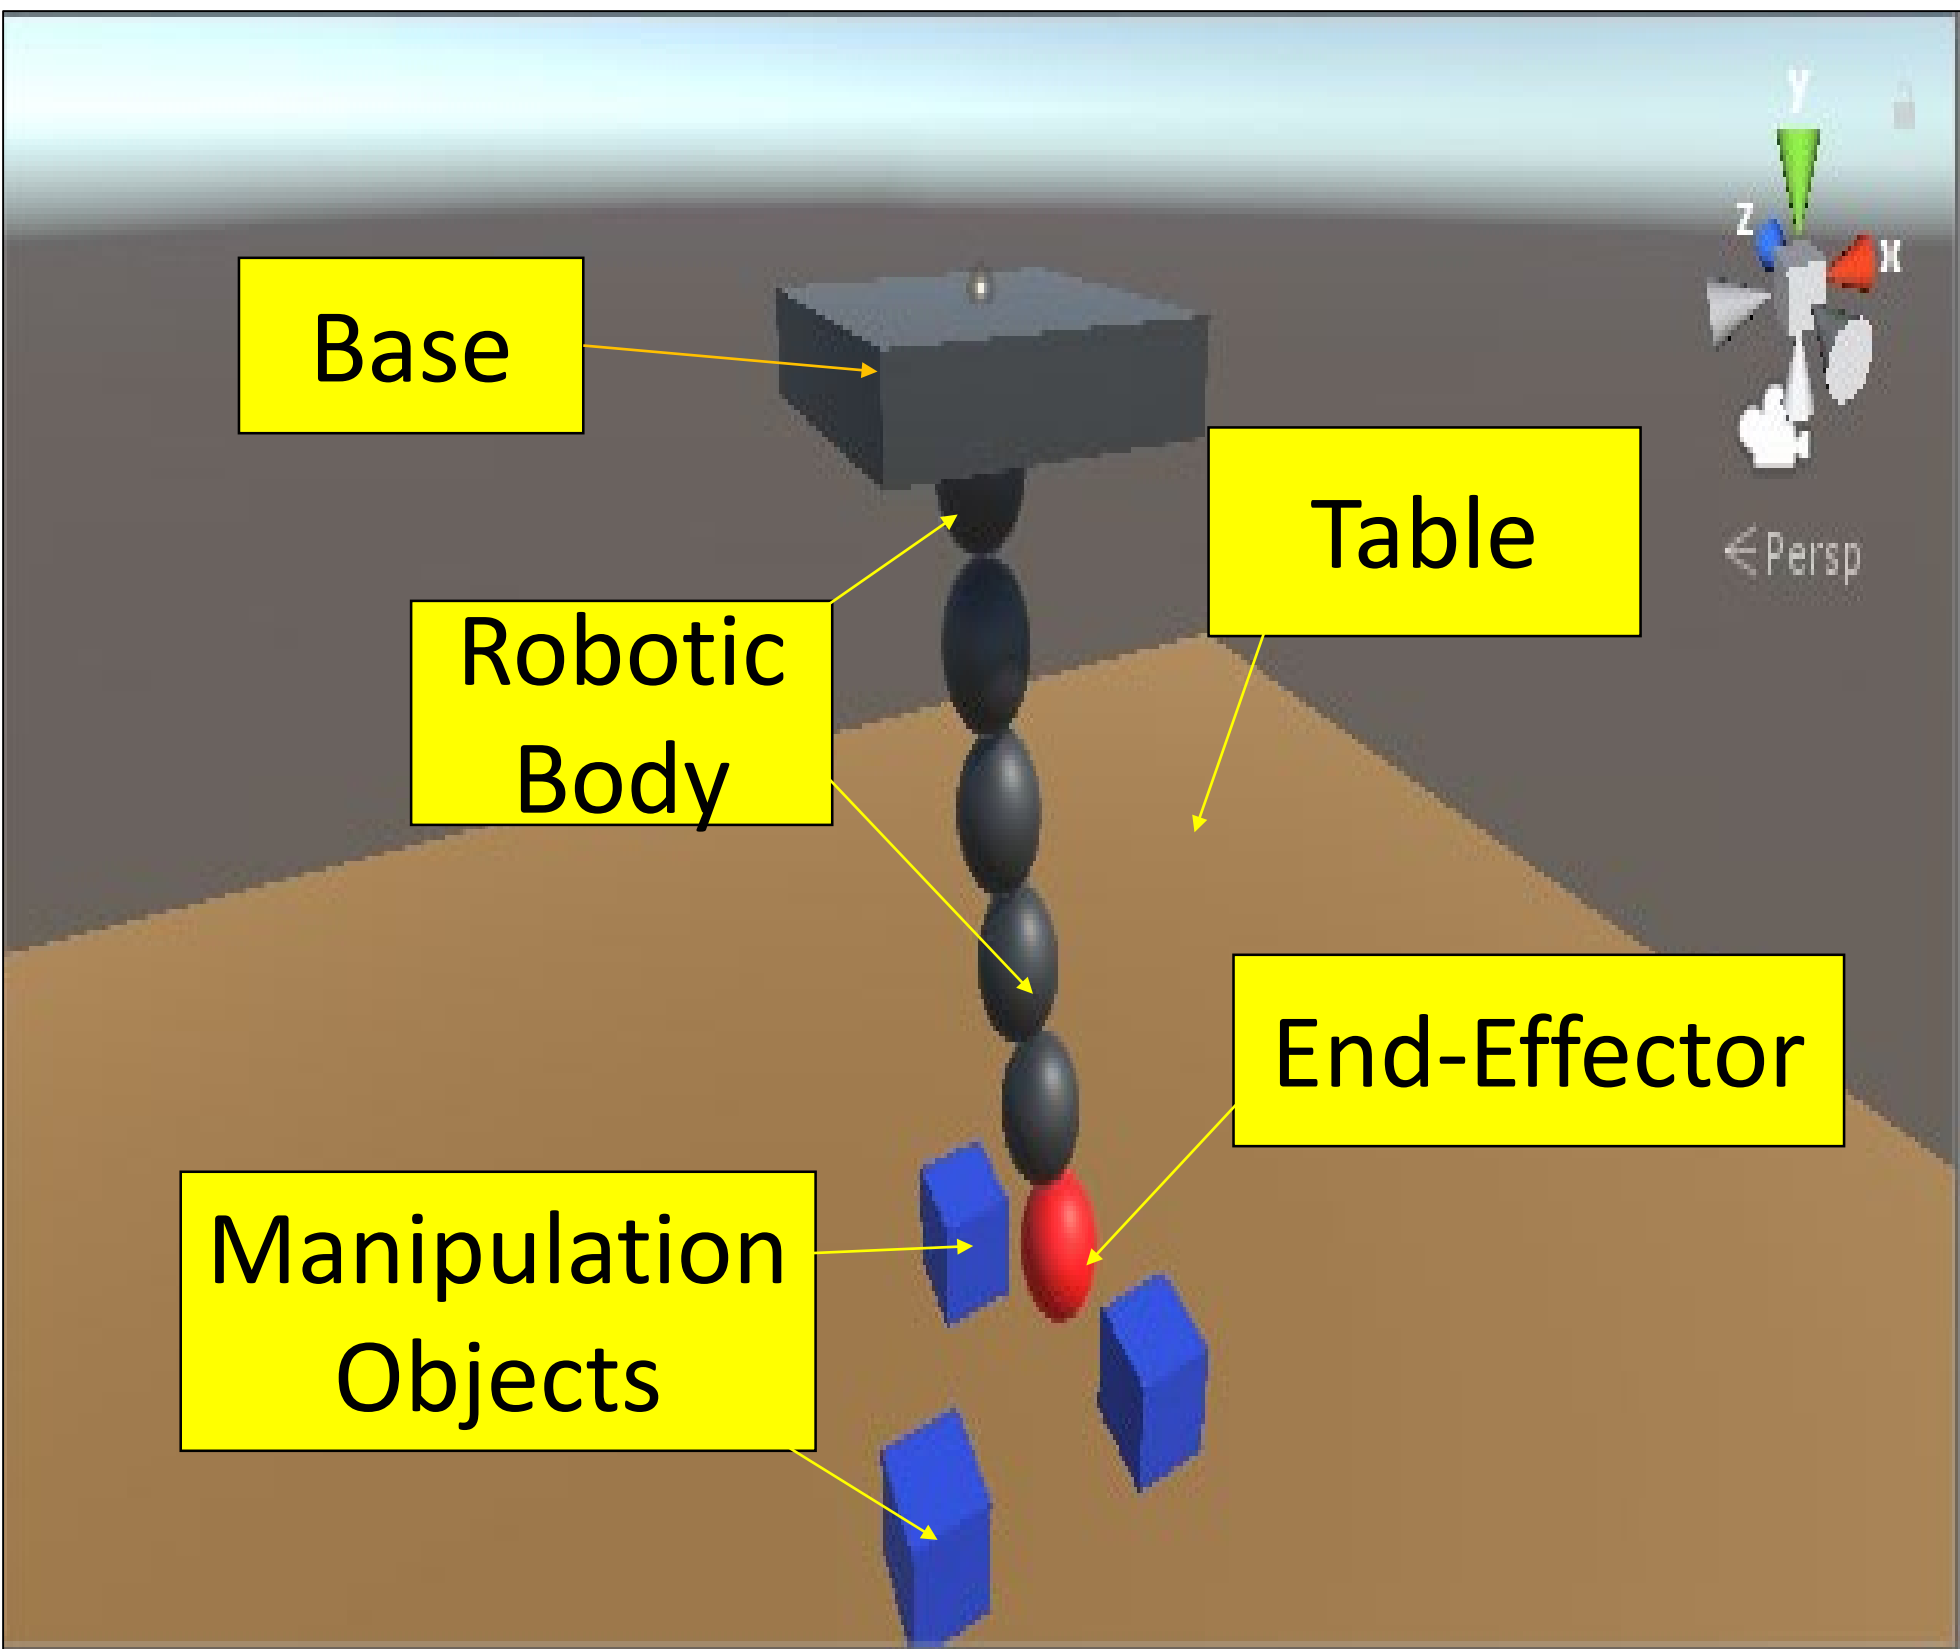


## What is Shared Autonomy?



## Teleoperation


We allowed for user-input control of the virtual robot by mapping all of its movements and functions to different keyboard keys.

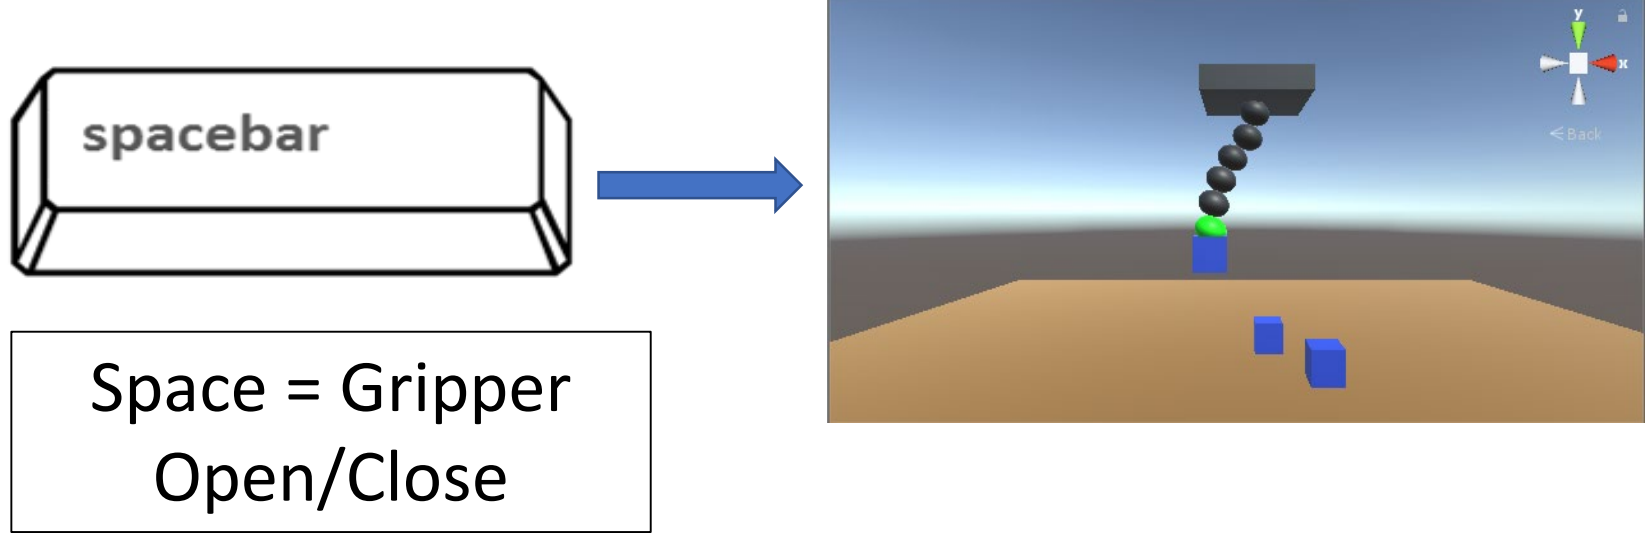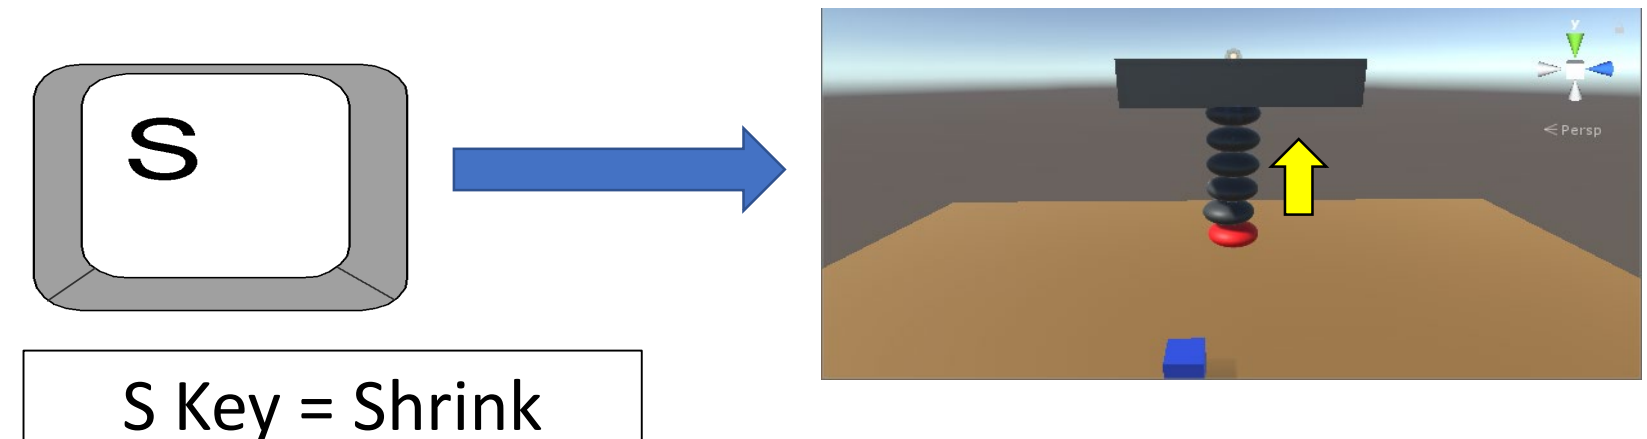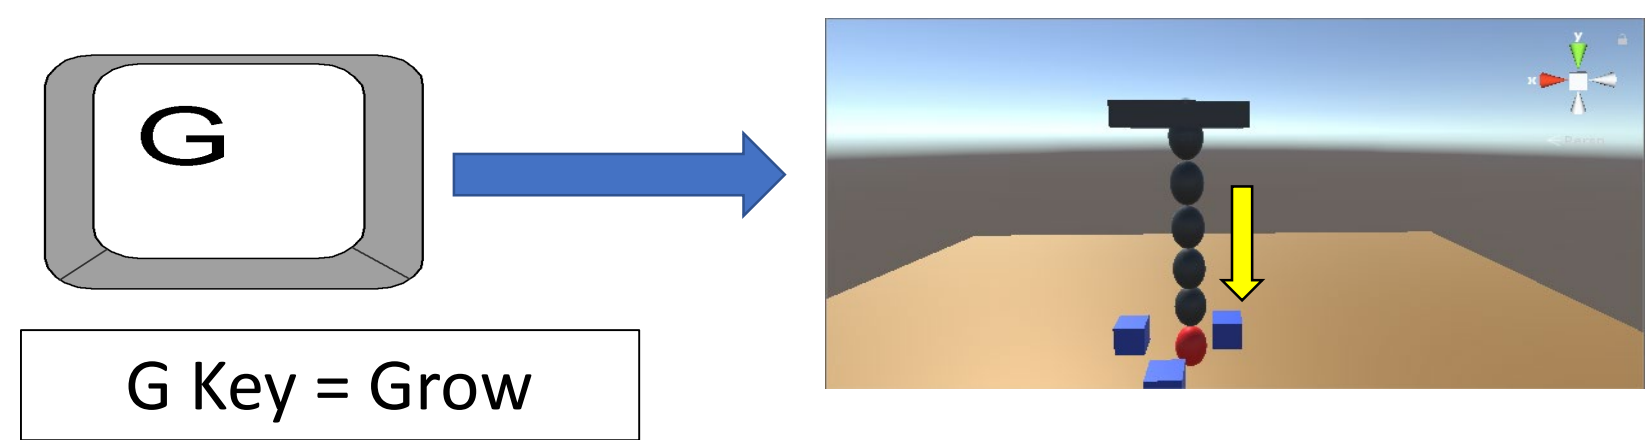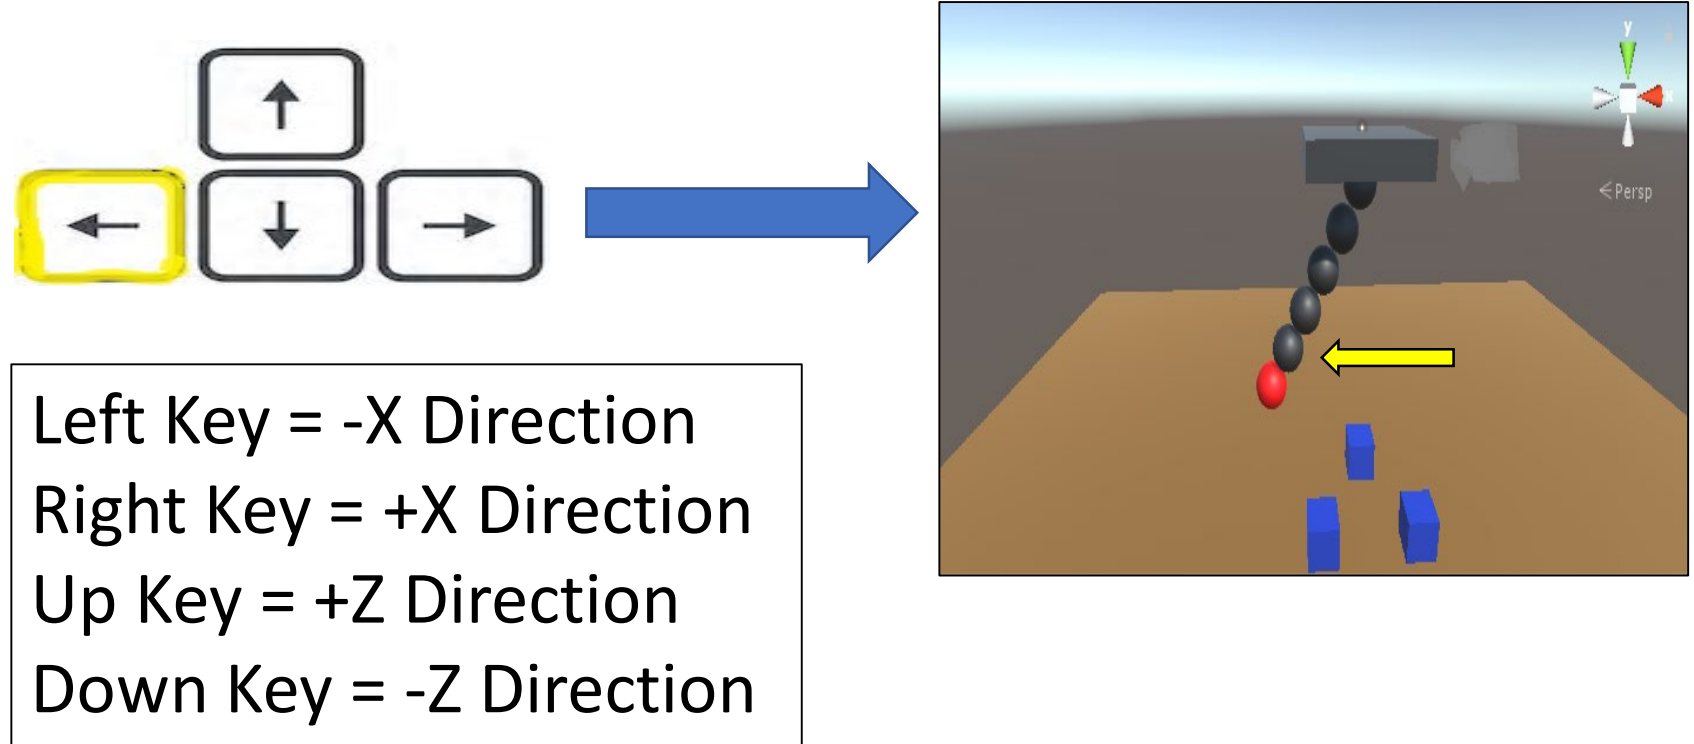



## Shared Autonomy

The algorithm that we implemented that allowed for the robot to interact with its environment as well as the user input from the player autonomously is called Movement-Based Smart Assistance (MBSA).

### So How Does MBSA Works?

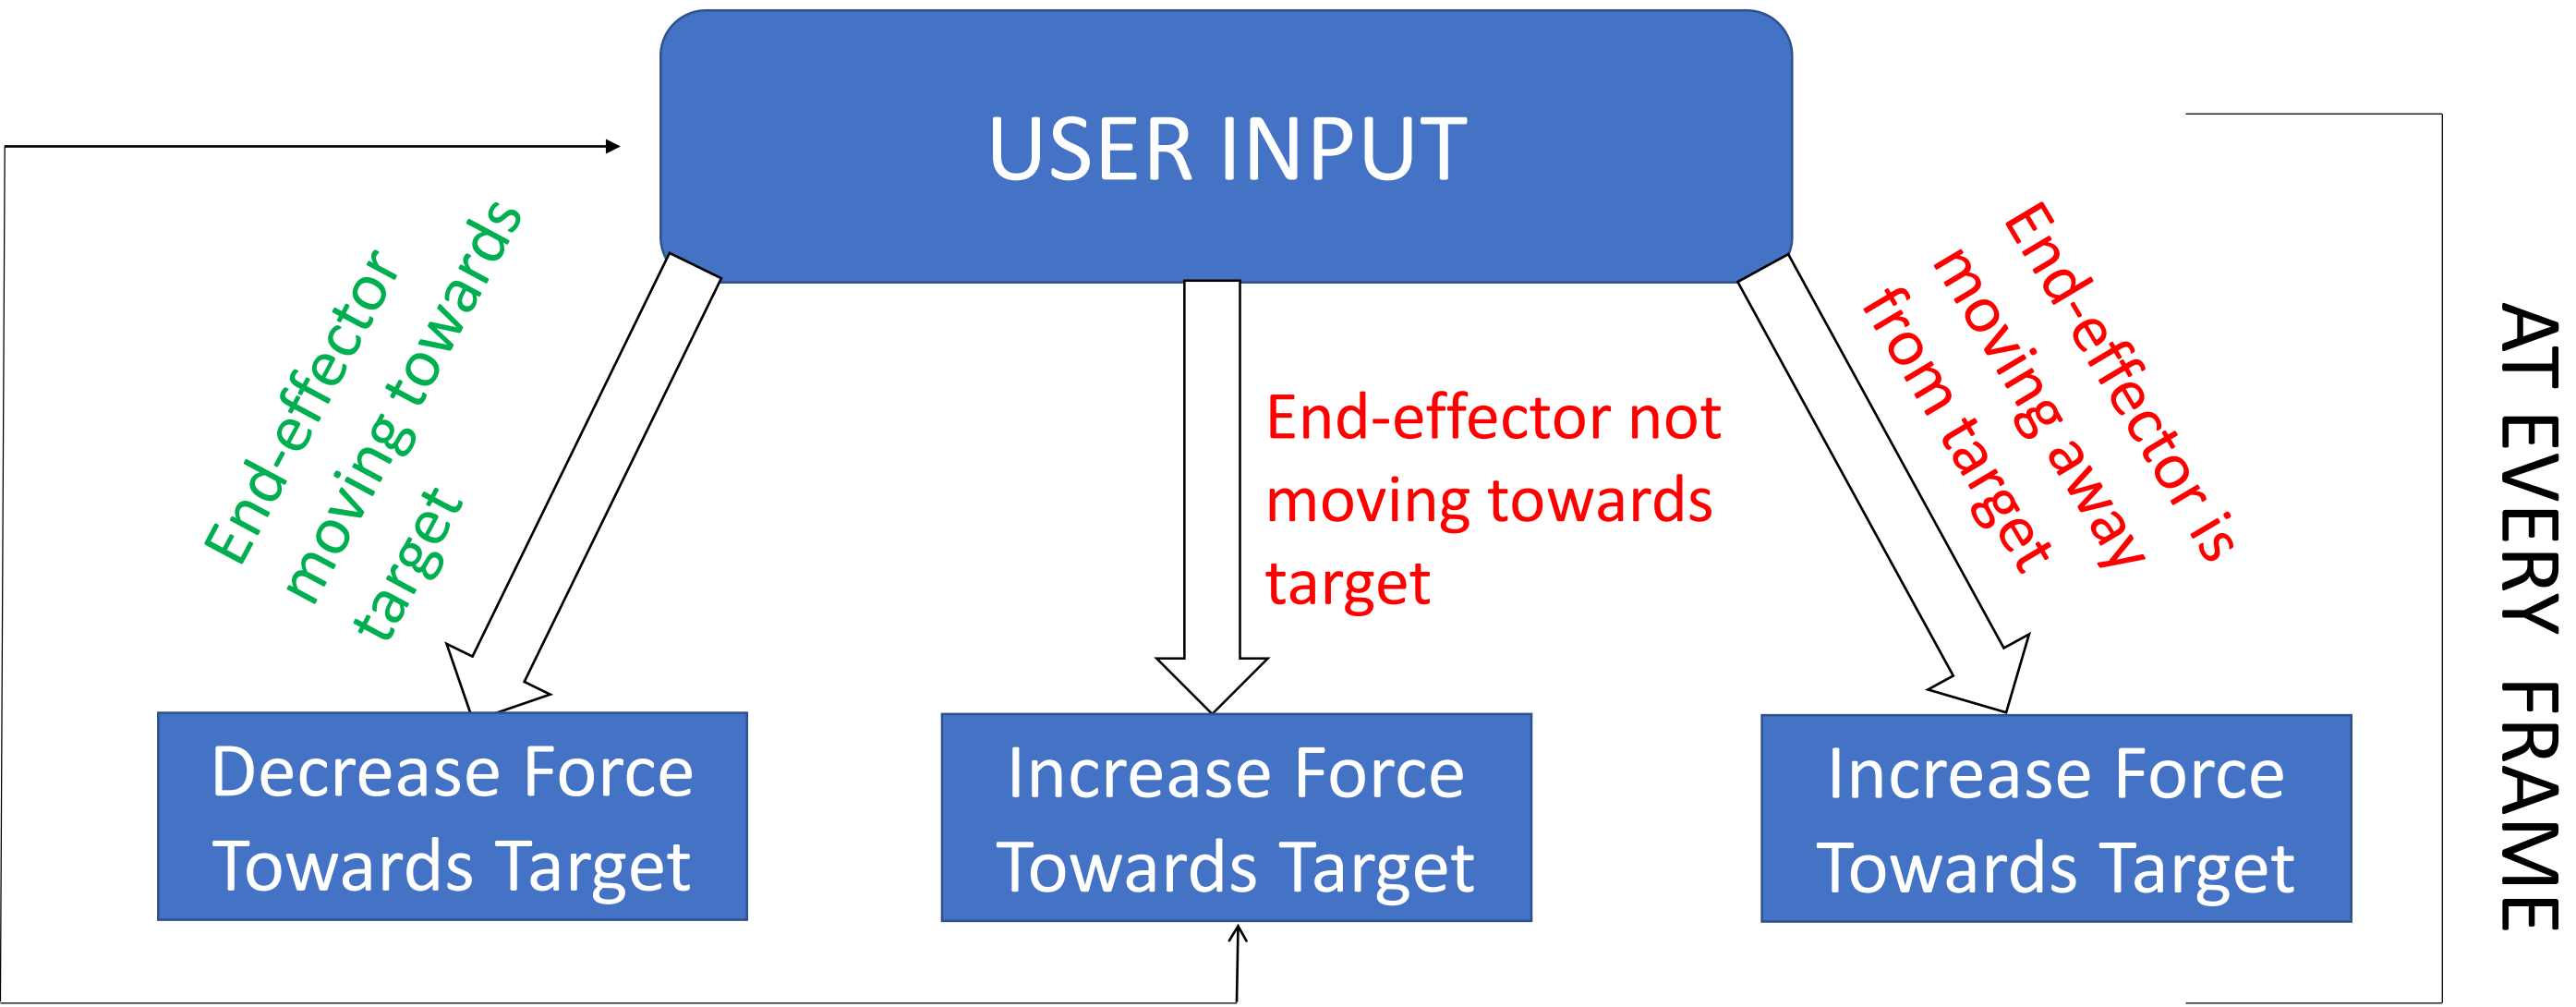

### MBSA Further Explained:

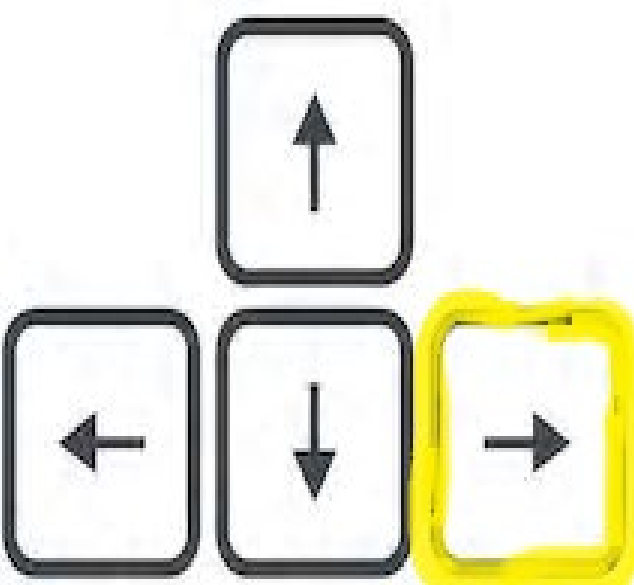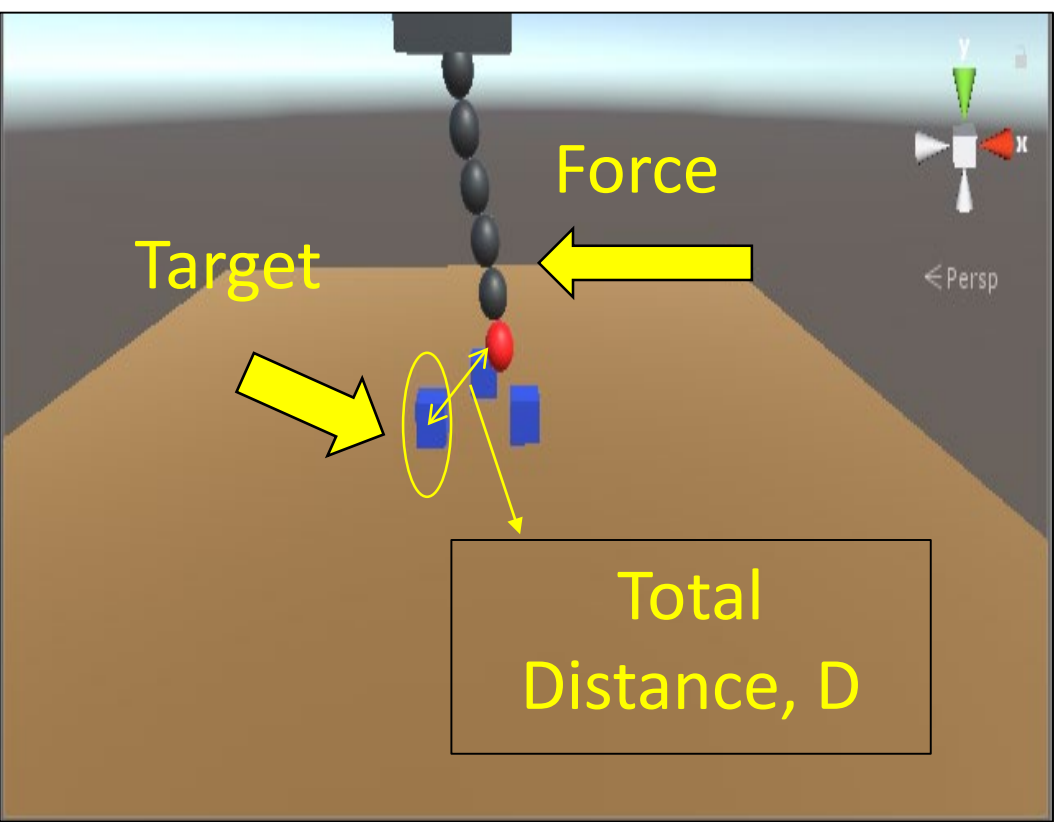

#### Distance Between End-Effector and Target

The total distance between the end-effector and the target is given in the equation below:

$$D = \sqrt{(T_x - E_x)^2 + (T_y - E_y)^2 + (T_z - E_z)^2}$$

, where  $D$  is distance,  $T$  is the position of the target and  $E$  is the position of the end-effector

## Conclusion & Future Work

Overall, we were able to successfully achieve shared autonomy between the human user and the virtual Vine Robot through the implementation of the Movement-Based Smart Assistance (MBSA) algorithm. Future work within this study will involve implementing obstacle avoidance within the MBSA algorithm so that the simulated Vine Robot will be able to detect obstacles within its environment and avoid them while it is completing its task.

## Acknowledgements

Special thanks to my mentor, Fabio Stroppa, my PI, Allison M. Okamura, as well as another graduate student working in the CHARM Lab, Zonghe Chua, for all of your contributions towards the completion of this project. I also want to give another special thanks to all of program coordinators from SURF that gave me the chance to work in the CHARM Lab this summer and also gave me knowledge and information that will prove vital as I make the transition onto graduate school in a couple of years.

## References

- M. M. Coad, L. H. Blumenschein, S. Cutler, J. A. R. Zepeda, N. D. Naclerio, H. El-Hussieny, U. Mehmood, J.-H. Ryu, E. W. Hawkes, and A. M. Okamura, "Vine robots: Design, teleoperation, and deployment for navigation and exploration" arXiv preprint arXiv:1903.00069, 2019.
- F. Stroppa, others,, and A. M. Okamura, "title" in 2019 IEEE World Haptics Conference (WHC). IEEE, 2019.