


2019

## Reduction of NO<sub>x</sub> Emissions in a Single Cylinder Diesel Engine Using SNCR with In-Cylinder Injection of Aqueous Urea

Anthony Timpanaro

University of North Florida, timpanaro87@gmail.com

Follow this and additional works at: <https://digitalcommons.unf.edu/etd>

 Part of the [Automotive Engineering Commons](#), [Catalysis and Reaction Engineering Commons](#), [Heat Transfer, Combustion Commons](#), [Other Mechanical Engineering Commons](#), and the [Thermodynamics Commons](#)

---

### Suggested Citation

Timpanaro, Anthony, "Reduction of NO<sub>x</sub> Emissions in a Single Cylinder Diesel Engine Using SNCR with In-Cylinder Injection of Aqueous Urea" (2019). *UNF Graduate Theses and Dissertations*. 876.  
<https://digitalcommons.unf.edu/etd/876>

This Master's Thesis is brought to you for free and open access by the Student Scholarship at UNF Digital Commons. It has been accepted for inclusion in UNF Graduate Theses and Dissertations by an authorized administrator of UNF Digital Commons. For more information, please contact [Digital Projects](#).  
© 2019 All Rights Reserved

Reduction of NO<sub>x</sub> Emissions in a Single Cylinder Diesel Engine  
Using SNCR with In-Cylinder Injection of Aqueous Urea

by

Anthony Timpanaro

Redacted

A thesis submitted to the Department of Mechanical Engineering

In partial fulfillment of the requirements for the degree of

Masters of Science in Mechanical Engineering

UNIVERSITY OF NORTH FLORIDA

COLLEGE OF COMPUTING, CONSTRUCTION, and ENGINEERING

April 2019

An unpublished novel by Anthony Timpanaro

## ABSTRACT

The subject of this study is the effect of in-cylinder selective non-catalytic reduction (SNCR) of  $\text{NO}_x$  emissions in diesel exhaust gas by means of direct injection of aqueous urea ( $(\text{NH}_2)_2\text{CO}$ ) into the combustion chamber. A single cylinder diesel test engine was modified to accept an electronically controlled secondary common rail injection system to deliver the aqueous urea directly into the cylinder during engine operation.

Direct in-cylinder injection was chosen in order to ensure precise delivery of the reducing agent without the risk of any premature reactions taking place. Unlike direct in-cylinder injection of neat water, aqueous urea also works as a reducing agent by breaking down into ammonia ( $\text{NH}_3$ ) and Cyanuric Acid ( $(\text{HOCN})_3$ ). These compounds serve as the primary reducing agents in the  $\text{NO}_x$  reduction mechanism explored here. The main reducing agent, aqueous urea, was admixed with glycerol ( $\text{C}_3\text{H}_8\text{O}_3$ ) in an 80-20 ratio, by weight, to function as a lubricant for the secondary injector.

The aqueous urea injection timing and duration is critical to the reduction of  $\text{NO}_x$  emissions due to the dependence of SNCR  $\text{NO}_x$  reduction on critical factors such as temperature, pressure, reducing agent to  $\text{NO}_x$  ratio, Oxygen and radical content, residence time and  $\text{NH}_3$  slip. From scoping engine tests at loads of 40 percent and 80 percent at 1500 rpm, an aqueous urea injection strategy was developed. The final injection strategy chosen was four molar ratios, 4.0, 2.0, 1.0 and 0.5 with five varying injection timings of 60, 20, 10, 0, and -30 degrees after top dead center (ATDC). In addition to the base line and aqueous urea tests, water injection and an 80-20 water-glycerol solution reduction agent tests were also conducted to compare the effects of said additives as well. The comparison of baseline and SNCR operation was expected to show

that the urea acted as a reducing agent, lowering NO<sub>x</sub> emissions up to 100% (based on exhaust stream studies) in the diesel exhaust gas without the aid of a catalyst.

The data collected from the engine tests showed that the aqueous urea-glycerol solution secondary had no effect on the reduction of NO<sub>x</sub> and even resulted in an increase of up to 5% in some tests. This was due to the low average in-cylinder temperature as well as a short residence time, prohibiting the reduction reaction from taking place. The neat water and water-glycerol solution secondary injection was found to have a reduction effect of up to 59% on NO<sub>x</sub> production in the emissions due to the evaporative cooling effect and increased heat capacity of the water.

## TABLE OF CONTENTS

ABSTRACT .....	ii
LIST OF FIGURES .....	vii
LIST OF TABLES .....	viii
LIST OF ABBREVIATIONS.....	ix
LIST OF SYMBOLS .....	xi
1 INTRODUCTION .....	1
2 LITERATURE REVIEW .....	3
2.1 NO <sub>x</sub> Formation.....	3
2.1.1 Thermal NO <sub>x</sub> .....	3
2.1.2 Prompt NO <sub>x</sub> .....	4
2.1.3 Fuel NO <sub>x</sub> .....	5
2.2 NO <sub>x</sub> Reduction Strategies.....	5
2.3 In-Cylinder Reduction.....	6
2.3.1 EGR.....	6
2.3.2 Water Injection / Emulsification.....	7
2.3.3 Fuel Additives.....	8
2.3.4 Alternate Combustion Strategies .....	9
2.4 After Treatments .....	10
2.5 Selective Reduction.....	11
2.5.1 SCR .....	15
2.5.2 SNCR .....	16
2.6 Important Factors.....	18
2.6.1 Temperature.....	18
2.6.2 Pressure .....	18
2.6.3 Reducing Agent/NO <sub>x</sub> Ratio .....	19
2.6.4 Oxygen and Radical Content.....	19
2.6.5 Residence Time .....	19
2.6.6 NH <sub>3</sub> Slip .....	20
3 EXPERIMENTAL SETUP AND PROCEDURE .....	21
3.1 Test Fuels and Reducing Agent.....	22

3.1.1	Diesel Fuel.....	22
3.1.2	Primary Reducing Agent / Aqueous Urea.....	22
3.1.3	Secondary Injection Testing Blends .....	23
3.2	Test Engine .....	23
3.3	Secondary Common Rail Injection System.....	24
3.4	Engine Dynamometer.....	26
3.5	NO <sub>x</sub> Analyzer .....	27
3.6	Data Acquisition and Monitoring .....	28
3.6.1	Dynamometer DAQ System.....	28
3.6.2	NO <sub>x</sub> Emission Mass Flow Rate .....	29
3.6.3	Combustion DAQ System.....	30
3.6.4	Single Zone In-Cylinder Combustion Model .....	30
3.7	Test Sequence and Method.....	31
3.7.1	Scoping.....	31
3.7.2	Baseline Testing.....	31
3.7.3	SNCR Engine Operation .....	32
3.7.4	Test Modes .....	32
4	RESULTS AND DISCUSSION.....	34
4.1	Preliminary Baseline Scoping .....	34
4.2	Baseline Tests .....	34
4.3	SNCR 40% Load (5 N-m) Results.....	34
4.3.1	80-20 Aqueous Urea-Glycerol Injection (40% Load) .....	35
4.3.2	80-20 Water-Glycerol Injection (40% Load) .....	36
4.3.3	Neat Water Injection (40% Load).....	37
4.4	SNCR 80% Load (10 N-m) Results.....	38
4.4.1	80-20 Aqueous Urea-Glycerol Injection (80% Load) .....	38
4.4.2	80-20 Water-Glycerol Injection (80% Load) .....	39
4.4.3	Neat Water Injection (80% Load).....	40
4.5	Reducing Agent .....	41
4.6	Molar Ratio.....	41
4.7	Injection Timing .....	42

4.8	Temperature Window.....	42
4.9	Oxygen Content .....	44
4.10	Residence Time.....	44
5	CONCLUSIONS, LESSONS LEARNED AND RECOMMENDATIONS.....	46
5.1	Conclusions .....	46
5.2	Lessons Learned .....	48
5.3	Recommendations.....	48
	WORKS CITED .....	49
	APPENDIX .....	54

## LIST OF FIGURES

Figure 2.1 – Illustration of Prompt NO <sub>x</sub> and Fuel NO <sub>x</sub> paths of formation by Miller and Bowman, 1989 [6] .....	5
Figure 2.2 – Illustration of further Thermal DeNO <sub>x</sub> reactions by Kimball-Linne and Hanson, 1986 [26] .....	12
Figure 2.3 – Illustration of urea decomposition and NO <sub>x</sub> reduction mechanism by Caton and Siebers, 1989 [29] .....	14
Figure 3.1 – Testing equipment at the University of North Florida’s Vehicles, Engines, Fuels, and Emissions Laboratory .....	21
Figure 3.2 – Test Schematic .....	22
Figure 3.3 – Changfa Apollo CF186 single cylinder diesel engine .....	24
Figure 3.4 – VW common rail injection system used for secondary in-cylinder injection.....	25
Figure 3.5 – Dynamatic Absorbing Dynamometer Model 758 DG.....	26
Figure 3.6 – In-house NO <sub>x</sub> analyzer.....	27
Figure 4.1 – 40% load 80-20 aqueous urea-glycerol SNCR NO <sub>x</sub> reduction results for the different molar ratios tested.....	35
Figure 4.2 – 40% load 80-20 water-glycerol NO <sub>x</sub> reduction results for the different molar ratios tested .....	36
Figure 4.3 – 40% load neat water NO <sub>x</sub> reduction results for the different molar ratios tested .....	37
Figure 4.4 – 80% load 80-20 aqueous urea-glycerol SNCR NO <sub>x</sub> reduction results for the different molar ratios tested.....	38
Figure 4.5 – 80% load 80-20 water-glycerol NO <sub>x</sub> reduction results for the different molar ratios tested .....	39
Figure 4.6 – 80% load neat water NO <sub>x</sub> reduction results for the different molar ratios tested .....	40
Figure 4.7 – Average in-cylinder temperature over the secondary injection window for the 40% load tests.....	43
Figure 4.8 – Average in-cylinder temperature over the secondary injection window for the 80% load tests.....	44



## LIST OF TABLES

Table 3.1 – Test Engine Specifications .....	24
Table 3.2 – Dynamometer DAQ system data acquired and control function .....	28
Table 3.3 – Combustion DAQ system data acquired and control function.....	30
Table 3.4 – The testing variables of $\text{NH}_3/\text{NO}_x$ molar ratio and start of injection for each secondary injection blend .....	33
Table 4.1 – Baseline test average, standard deviation, maximum, minimum, 95% confidence interval, and the percent difference of the 95% confidence interval from the average .....	34

## LIST OF ABBREVIATIONS

ATDC – After Top Dead Center  
BL – Baseline  
BMEP – Brake Mean Effective Pressure  
BSFC – Brake Specific Fuel Consumption  
BTE – Brake Thermal Efficiency  
 $C_3H_8O_3$  – Glycerol  
CFD – Computational Fluid Dynamics  
CFR – Code of Federal Regulations  
CH – Methylene Radicals  
 $CH_2$  – Methylene  
 $CH_2NH_2$  – Methenamine Radical  
 $CH_2NH_2OO$  – Oxygenated Methenamine Radical  
 $CH_3NH_2$  – Methylamine  
 $CH_4$  – Methane  
CI – Compression Ignition  
CN – Cyanide  
CO – Carbon Monoxide  
 $CO(NH_2)_2$  – Urea  
 $CO_2$  – Carbon Dioxide  
CuZSM5 - Zeolite Socony Mobil-5  
DAQ – Data Acquisition  
DEF – Diesel Exhaust Fluid  
DWI – Direct Water Injection  
E10 – 10% Ethanol-Diesel Blend  
E15 – 15% Ethanol-Diesel Blend  
EGR – Exhaust Gas Recirculation  
EPA – Environmental Protection Agency  
FTP – Federal Test Procedure  
GHG – Green House Gasses  
 $H_2CN$  – Methyleneaminy Radical  
 $H_2O$  – Water  
HC – Hydrocarbon  
HCCI – Homogeneous Charge Combustion Ignition  
HCN – Hydrogen Cyanide  
HNCO – Isocyanuric Acid  
 $HNO_2$  – Nitrous Acid  
 $HNO_3$  – Nitric Acid  
 $(HOCN)_3$  – Cyanuric Acid  
HSDI – High Speed Direct Injection  
LNT – Lean  $NO_x$  Trap  
LOI – Length of Injection  
N and  $N_2$  – Nitrogen  
 $N_2H$  – Diazenylium  
 $N_2O$  – Nitrous Oxide

Na<sub>2</sub>CO<sub>3</sub> – Sodium Carbonate  
NAC – NO<sub>x</sub> Absorber Catalyst  
NCO – Cyanate  
NH – Imidogen  
NH<sub>2</sub> – Amidogen  
NH<sub>2</sub>CH<sub>2</sub>OOH – Aminomethanol  
NH<sub>3</sub> – Ammonia  
NO – Nitrogen Monoxide  
NO<sub>2</sub> – Nitrogen Dioxide  
NO<sub>x</sub> – Oxides of Nitrogen  
NSR – Normalized Stoichiometric Ratio  
O and O<sub>2</sub> – Oxygen  
O<sub>3</sub> – Ozone  
OH – Hydroxide  
PM – Particulate Matter  
PPR – Pulses Per Revolution  
SCR – Selective Catalytic Reduction  
SET – Supplemental Emissions Test  
SI – Spark Ignition  
SNCR – Selective Non-Catalytic Reduction  
SO<sub>3</sub> – Sulfur Trioxide  
SOI – Start of Injection  
V<sub>2</sub>O<sub>5</sub> – Vanadium Pentoxide  
VEFEL - Vehicles, Engines, Fuels, and Emissions Laboratory  
WO<sub>3</sub> – Tungsten Trioxide

## LIST OF SYMBOLS

$\dot{n}$  – Molar flow rate

$m$  – Mass

$\dot{m}$  – Mass flow rate

$M$  – Molar weight

$P$  – Pressure

$R$  – Gas Constant

$T_{\text{cyl}}$  - Temperature

$V$  – Volume

$x$  – Concentration

# 1 INTRODUCTION

Practically all fossil fuel combustion processes produce harmful gas byproducts and particulate matter (PM), mainly composed of unburned and radical Hydrocarbons (HC), that pollutes the air and other numerous organisms and ecosystems [1]. Despite efforts to find less harmful alternative fuels and power sources such as solar and wind power, the burning of fossil fuels like oil, natural gas and coal, still remains the leading source of the world's energy production [2].

In an attempt to reduce the amount of pollutants and other harm to the environment, governments and agencies around the world have implemented standards and regulations to control the amount of air pollution produced by the burning of fossil fuels. In the United States, the Environmental Protection Agency (EPA) is the federal authority on creating regulations that govern interaction with the environment. The EPA regulates emissions on all fossil fuel burning processes from coal power plants to consumer gasoline lawn mowers. The EPA has set regulations on the amounts of particular types of vaporous byproducts in combustion emissions such as carbon monoxide (CO), PM and oxides of nitrogen (NO<sub>x</sub>).

The EPA considers NO<sub>x</sub> to be nitric oxide (NO) and nitrogen dioxide (NO<sub>2</sub>) [3]. In combustion, the main constituents of NO<sub>x</sub> are NO and NO<sub>2</sub> [4]. These gases are toxic to most living creatures and are highly reactive in the atmosphere. NO<sub>x</sub> combines with available reactants to form ground level O<sub>3</sub>, which is also toxic to humans, plants and other organic materials [1]. NO<sub>x</sub> can also react with water (H<sub>2</sub>O) to form nitrous acid (HNO<sub>2</sub>) and nitric acid (HNO<sub>3</sub>) in acid rain [4]. Photochemical smog can also occur when NO<sub>x</sub> reacts with unburned HC and sunlight [1]. Current EPA NO<sub>x</sub> emission standards for light-duty and heavy-duty automobiles can be found at the EPA's website [5].

$\text{NO}_x$  is one of the key focuses of emission reduction in all combustion processes. The reduction of  $\text{NO}_x$  in diesel engines, specifically, has received worldwide attention due to its harmful health and environmental effects. Over the years, many  $\text{NO}_x$  reduction strategies have been tested and implemented. As emissions regulations become more stringent, more effective and efficient methods of reduction of  $\text{NO}_x$  will be necessary. One such method is the selective reduction of  $\text{NO}_x$  by the means of specialized reducing agents and injection techniques. Selective non-catalytic reduction (SNCR), unlike selective catalytic reduction (SCR), can achieve selective  $\text{NO}_x$  reduction without the addition of expensive and complicated secondary mechanisms like catalysts, and instead perform  $\text{NO}_x$  reduction directly in the cylinder. The object of this study was to reduce  $\text{NO}_x$  emissions in a single cylinder diesel engine by the secondary injection of aqueous urea directly into the cylinder.


## 2 LITERATURE REVIEW

### 2.1 NO<sub>x</sub> Formation

In stoichiometric or theoretical complete combustion, hydrocarbon fuel reacts with oxygen in air (O<sub>2</sub> and N<sub>2</sub>) to release heat and form H<sub>2</sub>O and CO<sub>2</sub>, while the N<sub>2</sub> passed through unreacted. This of course is ideal and unfortunately, incomplete combustion occurs which leads to the additional formation of undesirable byproducts such as NO<sub>x</sub>, CO, unburned HC, and PM. There are three mechanisms in which NO<sub>x</sub> is formed in the burning of fossil fuels: Thermal NO<sub>x</sub>, Prompt NO<sub>x</sub>, and Fuel NO<sub>x</sub> [6].


#### 2.1.1 Thermal NO<sub>x</sub>

The main mechanism of NO<sub>x</sub> formation in the combustion process occurs from the burning of fuel at high temperatures in a process known as Thermal NO<sub>x</sub>. In heat engines, higher temperatures mean higher efficiency and the differences in temperatures at different states is what drives the cycle, typically from a hot state (high energy) to a lower heat state (low energy). Unfortunately, it is at these higher temperatures, typically above 1873 K, in which the strong triple bond in the atmospheric nitrogen (N<sub>2</sub>) are broken to react with available oxygen (O and O<sub>2</sub>) to form NO<sub>x</sub> [7]. The primary reactions of NO<sub>x</sub> formation were derived by Zeldovich in 1971 [6]. Equations 2.1 through 2.3 show the chemical reactions of N<sub>2</sub> breaking down and combining with radicals of O and Hydroxide (OH).




Equation 2.1

In high temperatures the strong triple bond between the nitrogen atoms is broken and one nitrogen finds a radical oxygen atom and easily bond.



Equation 2.2

Oxygen pairs are easily separated to eagerly combine with single nitrogen atoms.



Equation 2.3

Hydroxide will also separate, and the radical oxygen will bond easily bond with the available nitrogen atom.

### 2.1.2 Prompt NO<sub>x</sub>

The second NO<sub>x</sub> formation process in combustion is known as Prompt NO<sub>x</sub>. This process of NO<sub>x</sub> formation was first discovered by Fenimore in 1971 [8]. This is when N<sub>2</sub> rapidly reacts in the first stages of combustion with O<sub>2</sub> and radical HC, typically carbon (C), methylidyne radicals (CH) and methylene (CH<sub>2</sub>) to eventually form NO, NO<sub>2</sub>, CO, and H<sub>2</sub>O [1]. There are various intermediate molecules such as imidogen (NH), hydrogen cyanide (HCN), methyleneaminy radical (H<sub>2</sub>CN) and cyanide (CN-) that form and continue to react to eventually form NO<sub>x</sub> through numerous and complex chemical reactions [7]. This process typically takes place in the initial stages of combustion in fuel-rich regions near the flame front(s) [6]. The main reactions for the initial intermediate species are shown in equations 2.4 through 2.8.








Figure 2.1 from Miller and Bowman shows the different paths of NO<sub>x</sub> formation from the intermediate species in Prompt NO<sub>x</sub> [6].



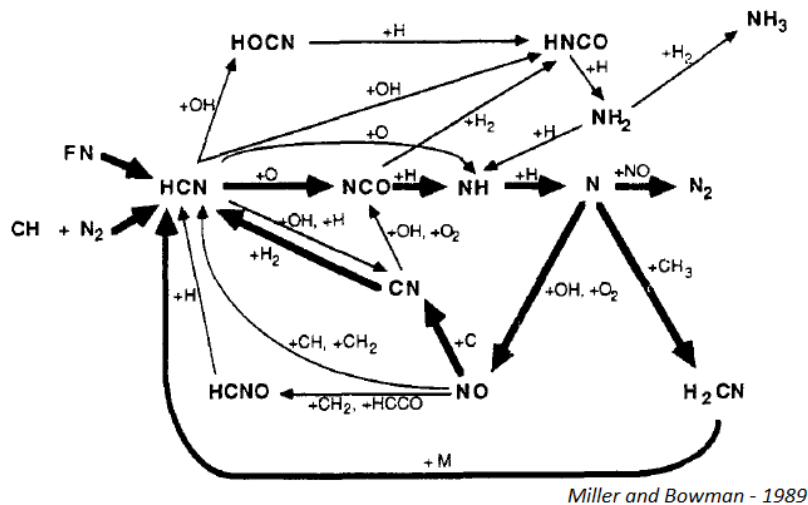


Figure 2.1 – Illustration of Prompt NO<sub>x</sub> and Fuel NO<sub>x</sub> paths of formation by Miller and Bowman, 1989 [6]

### 2.1.3 Fuel NO<sub>x</sub>

The third mechanism of NO<sub>x</sub> formation is known as Fuel NO<sub>x</sub>. This process takes place when bounded nitrogen in certain fuels such as coal and petroleum bases directly oxidizes during combustion. This mechanism occurs due to the formation of HCN and NH<sub>3</sub> from the bounded fuel nitrogen [6]. These intermediate compounds are then oxidized in the early stages of combustion through a multitude of reactions. Again, these newly formed compounds complete hundreds of various reactions to eventually form NO<sub>x</sub>. This mechanism is also illustrated in Figure 2.1 [6].

## 2.2 NO<sub>x</sub> Reduction Strategies

For the last seven decades, since the discovery by Haagen-Smit that automobile exhaust was a major contributor to ground level ozone, scientists and manufacturers have been researching and developing methods to control harmful combustion emissions such as NO<sub>x</sub> [9]. As regulations on combustion emissions have become more stringent over the years, a number of NO<sub>x</sub> reduction strategies have been developed. This is especially true for diesel engine emissions, considering their vast consumer and commercial use. All methods of reducing NO<sub>x</sub> in

diesel combustion can be placed in one of two categories: in-cylinder and after treatment. In-cylinder reduction usually refers to modification to the combustion process itself, including the use of fuel additives. After treatments are additional processes that occur downstream in the exhaust system, or post combustion.

## **2.3 In-Cylinder Reduction**

One in-cylinder method to reduce  $\text{NO}_x$  in diesel engine exhaust is by reducing the combustion temperature. As previously stated, Thermal  $\text{NO}_x$  in emissions are the largest contributors of Diesel  $\text{NO}_x$  emissions. Different strategies to lower combustion temperature inherently produce different performance levels of  $\text{NO}_x$  reduction. As previously stated, significant  $\text{NO}_x$  formation in combustion typically starts to occur at 1873 K [7]. Though at lower temperatures,  $\text{NO}_x$  formation may be reduced, but an increase in PM will occur. This is because at lower temperatures and equivalency ratios unburned radical HC can form PM [10].

### **2.3.1 EGR**

One temperature reducing  $\text{NO}_x$  reduction technique, and perhaps the most widely implemented in diesel engines, is exhaust gas recirculation (EGR).  $\text{NO}_x$  formation is greatest when combustion flame temperatures are high, so by lowering these temperatures increases the potential for unburned HC and PM formation. The EGR strategy redirects exhaust gases from the exhaust stream into the intake, ultimately reducing in-cylinder temperatures, as well as burning some of the unburned HC and PM [10]. In 1995, Pierpoint, et al. showed that with the triple injection strategy and 125 degree spray angle with 6% EGR, an approximate 40% reduction of  $\text{NO}_x$  and a 50% reduction in PM could be achieved at 75% load at 1600 rpm [11]. In these tests, it was shown that PM formation was reduced by modified injection strategies due to the improved mixing of air and fuel or an increase in homogeneity. Unfortunately, the reduction

technique in the aforementioned study greatly increased brake specific fuel consumption, (BSFC) due mainly from the retardation of injection timing needed. More recently, however, a low temperature EGR study by Mehrotra et al. in 2014 showed that with a combustion temperature reduction of 275 to 323 K, a cumulative reduction of 16.14% in NO<sub>x</sub> emissions and 23.33% reduction in PM emissions could be achieved while not affecting fuel economy [12].

### **2.3.2 Water Injection / Emulsification**

Another in-cylinder temperature lowering technique for NO<sub>x</sub> reduction is the use of water injection or water emulsification of the diesel fuel. By adding liquid water to the combustion process, an evaporative effect takes place, lowering the combustion temperature and in turn reducing the amount of NO<sub>x</sub> formed. This can be done by directly injecting the water into the cylinder or into the intake manifold to mix with the intake air. A study by Ishida, et al. in 1997, used gasoline injectors to port inject water into the intake manifold, reducing NO<sub>x</sub> by 50% under all operating conditions by maintaining a proper water-to-air ratio [13].

Another way of introducing water into the combustion process is stratified direct water-diesel injection. This type of injection utilizes a single injector that introduces the diesel fuel and water together instead of using separate injectors. Belford et al. in 2000 conducted a study using KIVA-3V computational fluid dynamics (CFD) models and experimental test engine data on the stratified water-diesel strategy [14]. In this study, two different levels of load, 44% and 86%, were examined. Simulations and engine test data correlated to show an average reduction in NO<sub>x</sub> of 50.8% and 39.4%, respectively, while BSFC remained approximately the same at the 44% load level. At the 86% load level, NO<sub>x</sub> reductions of 85.6% in models and 71.1% in engine tests were observed. Unfortunately, at the higher load, other emissions such as PM were higher with an increase in BSFC of 9.1% in models and 15.6% in engine tests.

Much like water injection, water emulsification of diesel fuel, or mixture, introduces water into the combustion chamber to achieve lower temperatures. In a 2011 study by Mailboom and Tazua, 25.6% water emulsified diesel fuel was injected into a 1.5L high speed direct injection (HSDI) automotive engine using four different injection strategies [15]. In this study, a maximum reduction in  $\text{NO}_x$  emissions of 50% was observed which varied depending on injection timing.

### **2.3.3 Fuel Additives**

The use of additives to diesel fuel is another in-cylinder technique of reducing diesel emissions. Additives such as ethanol, biodiesel and cetane booster have been the subject of numerous emission reducing experiments. The results from the use of these additives to reduce  $\text{NO}_x$  emissions have been mixed depending on variables such as engine capability and fuel blend composition. A study by Li et al. in 2004, compared ethanol-diesel blends and the effects on engine performance and emissions [16]. The analysis concluded that  $\text{NO}_x$  emissions of the 10% ethanol-diesel (E10) and 15% ethanol-diesel (E15) blends were reduced by 2.2% and 4.2%, respectively, while also decreasing other emissions such as CO and an increase in brake thermal efficiency (BTE) from the addition of the oxygenated ethanol fuel. Unfortunately, the ethanol-diesel blends also showed an increase hydrocarbon emissions of up to 40%, as well as an increase of BSFC due to the reduced heating value of ethanol compared to diesel. In another study by Xing-cai et al. in 2004, ethanol-diesel blends were tested with the addition of cetane booster [17]. In this study, for an ethanol / diesel / cetane booster blend of 15% ethanol, 0.4% cetane booster (E15-D+0.4%), resulted in higher CO emissions but reduced  $\text{NO}_x$  by approximately 20% at 0.6 MPa brake mean effective pressure (BMEP). For bio-diesel / diesel blends, a 2009 study conducted by Thompson and Nuszowski tested 10% (B10) and 20% (B20)

bio-diesel / diesel fuel blends on a 1992 Detroit Diesel Series 60 engine [18]. That study showed that while decreasing fuel consumption and other emissions, there was an increase of  $\text{NO}_x$  emissions of 3% and 5% in the B10 and B20 blends, respectively.

#### **2.3.4 Alternate Combustion Strategies**

Recently, in the push in efficiency and performance, alternative combustion strategies have been explored. Strategies such as dual fuel and Homogeneous Charge Compression Ignition (HCCI) utilize multiple fuels, typically a spark ignited (SI) fuel with a compression ignition (CI) fuel for initial detonation. Common SI fuels in these applications often include non-Nitrogen bound fuels such as natural gas ( $\text{CH}_4$ ). Naturally, by implementing these non-Nitrogen bound fuels, a reduction in the production of  $\text{NO}_x$  in emissions by the Fuel  $\text{NO}_x$  mechanism of formation is achieved. In addition, this method makes it possible to achieve better homogeneous fuel mixing, reducing the likelihood of fuel rich areas in the combustion cylinder and thus the likelihood of forming Prompt  $\text{NO}_x$ . Initial attempts of diesel-natural gas HCCI engines were retro-fitted diesel engines that produced poor performance, reliability and emissions [19]. More recently, however, studies such as that conducted by Stanglmaier, et al. in 2001, have shown that a natural gas-diesel HCCI engine can decrease  $\text{NO}_x$  emissions by up to 90% while maintaining high load fuel efficiency and a 10 to 15% increase in low load fuel efficiency when compared to traditional spark ignited natural gas engines [20]. Other benefits to this strategy include the possibility to operate solely on diesel fuel if natural gas, or whichever SI fuel, may become scarce or unavailable [19]. Obvious downfalls of this strategy would be the initial cost of conversion of the vehicle as well as the current limited availability of natural gas in most markets, especially the consumer market.

## 2.4 After Treatments


After treatment strategies for emission reduction take place in the post-combustion exhaust stream. Such strategies almost always involve the addition of extra, and in most cases, costly equipment. Examples of such equipment may include precious metal catalysts, filters, injection systems, etc.

An example of an after treatment device for reducing  $\text{NO}_x$  are  $\text{NO}_x$  absorber catalyst (NAC) or lean  $\text{NO}_x$  traps (LNT). These catalysts are often constructed of multiple specific elements in order to achieve the desired  $\text{NO}_x$  control; for example, the use of platinum for oxidation of the  $\text{NO}_x$ , barium to store the  $\text{NO}_x$  and rhodium for  $\text{NO}_x$  reduction [21]. NAC absorb  $\text{NO}_x$  in lean burning conditions and then sequentially release the converted  $\text{N}_2$  in rich burning purges [10]. This rich burning, or regeneration, is often done by the addition of flame igniter [10]. Also, since the use of these devices increases PM, many applications include the use of a PM filter to reduce PM emissions. In a study by West and Sluder in 2000, a Mercedes A170 was fitted with an aftermarket “light off” catalyst and  $\text{NO}_x$  absorber [22]. In this study  $\text{NO}_x$  reductions of up to 90% were achieved. In 2001, Schenk, et al. achieved reduction of  $\text{NO}_x$  in excess of 90% in testing of 1999 emission specification 5.9L medium-duty diesel engine over multiple steady-state operating conditions utilizing a dual path alternating flow restriction with catalyzed PM filters and NAC [23]. In a 2005 study by Hinz et al., a heavy-duty diesel, single leg strategy was tested [24]. The absorber catalyst system in this study incorporated a bypass during rich generation. A result of a 67% and 79%  $\text{NO}_x$  reduction was observed with the Federal Test Procedure (FTP) and the Supplemental Emissions Test (SET), respectively.

## 2.5 Selective Reduction


Another method of after treatment is the selective reduction of  $\text{NO}_x$ , a process in which  $\text{NO}_x$  is reduced by a specific chemical reaction by means of a reducing agent. Selective reduction of  $\text{NO}_x$  in combustion gasses was first discovered in 1972 by Lyon and the Exxon Research and Engineering Group and was patented in 1975 [25]. Lyon's method utilized the injection of Ammonia ( $\text{NH}_3$ ) directly into combustion flue gas in the presence of excess  $\text{O}_2$ . Lyons original process, using  $\text{NH}_3$  as the reducing agent, is called Thermal De $\text{NO}_x$ . Different reducing agents and the addition of a catalyst have also been adapted to the selective reduction strategy. Lyon's original reduction process is now known as SNCR while the addition of said catalyst has become known as SCR.

The chemical reaction mechanism behind the selective reduction of  $\text{NO}_x$  is centered on one main compound, amidogen ( $\text{NH}_2$ ) [26]. In the Thermal De $\text{NO}_x$  process,  $\text{NH}_3$  reacts with OH, O, and H radicals that are available in the high exhaust gas temperatures ( $>1073\text{ K}$ ) to form  $\text{NH}_2$ . These radicals are what are believed to "drive" the selective reduction process [27]. Lyon also showed that  $\text{NH}_3$  for use in selective reduction assists in the reduction of sulfur trioxide ( $\text{SO}_3$ ) and HC in combustion exhaust gasses [28]. Though there have been numerous reactions studied over the years for the Thermal De $\text{NO}_x$  process, the main reactions are shown below in equations 2.9 through 2.13, as well as an illustration of further reaction processes from Kimball-Linne and Hanson, 1986 (Figure 2.2), showing diazenylium ( $\text{N}_2\text{H}$ ) and other interstitial compounds [26]. Additional combustion products not including compounds of  $\text{N}_2$  and  $\text{O}_2$  are represented as the symbol M:



Ammonia will combine with hydroxide to form amidogen and water.

Equation 2.9



Equation 2.10

Amidogen will combine with hydroxide to further breakdown into imidogen and water.



Amidogen will combine with nitric oxide to form diazenylium and hydroxide.



Amidogen will combine with nitric oxide to also form nitrogen and water.



Diazenylium will combine with additional products (excluding nitrogen and oxygen) to nitrogen and other additional products.

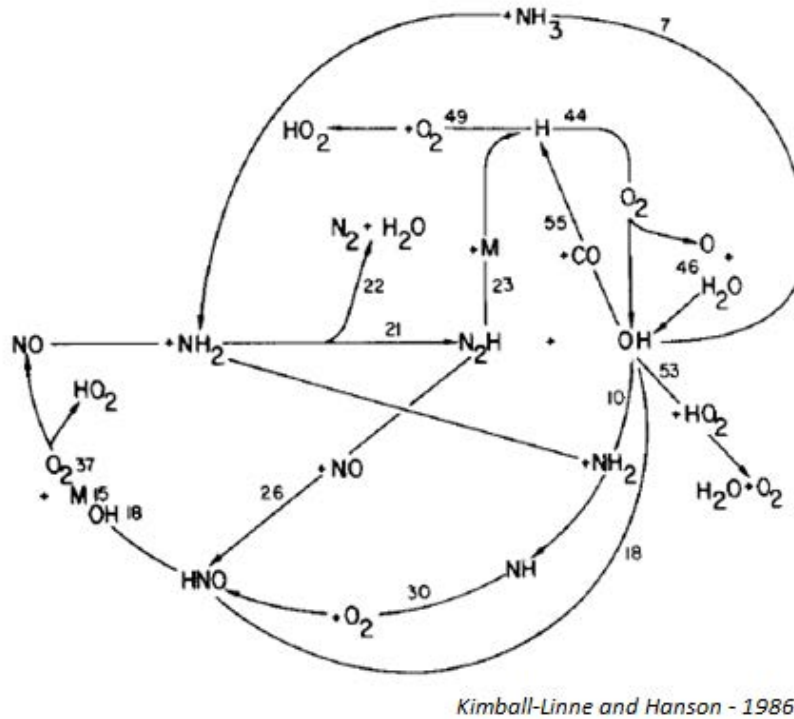


Figure 2.2 – Illustration of further Thermal DeNO<sub>x</sub> reactions by Kimball-Linne and Hanson, 1986 [26]


Another agent that has been studied in the selective reduction of NO<sub>x</sub> is cyanuric acid ((HOCN)<sub>3</sub>), which breaks down into isocyanic acid (HNCO) when exposed to high temperatures. This selective reduction process using HCNO as the reducing agent has become known as REPRENO<sub>x</sub> which is an abbreviation for rapid reduction of NO<sub>x</sub> [29]. This process is said to be rapid due to the speed at which the reduction reaction takes place. One drawback to this reduction process is the excess of N<sub>2</sub>O byproducts from NO<sub>x</sub> reduction due to the interstitial



formation of the compound cyanate (NCO) [6]. The primary selective reduction reactions for this process are shown below in equations 2.14 and 2.15 [29]:



Isocyanic acid combines with hydroxide to form cyanate and water.



Cyanate will react with nitric oxide to form nitrous oxide and carbon monoxide.

An alternative reducing agent for the selective reduction of NO<sub>x</sub> is urea (CO(NH<sub>2</sub>)<sub>2</sub>), and was first patented in 1980 by Arand et al. [30]. This process of using urea as the reducing agent has become known as the NO<sub>x</sub>OUT process [4]. Unlike NH<sub>3</sub>, urea is nontoxic and easily transported, especially when in an aqueous solution, making it more practical for use in mobile applications [31]. In addition, urea is an ideal agent for selective NO<sub>x</sub> reduction for it is a carrier of NH<sub>3</sub> and HNCO and thus combining the Thermal DeNO<sub>x</sub> and REPREENO<sub>x</sub> reduction processes. It has been shown decomposition of urea produces equal parts of NH<sub>3</sub> and HNCO [29]. The decomposition reaction of urea is shown in Equation 2.16:



*Urea will decompose into ammonia and isocyanic acid.*

An illustration of urea decomposition and NO<sub>x</sub> reduction mechanism by Caton and Siebers, 1989 can also be seen below in Figure 2.3 [29]:






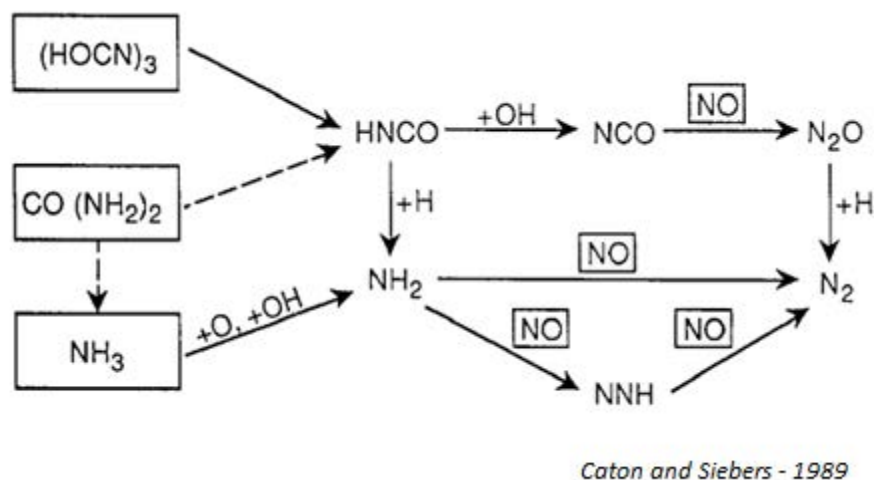


Figure 2.3 – Illustration of urea decomposition and NO<sub>x</sub> reduction mechanism by Caton and Siebers, 1989 [29]

More recently, the reducing agent Methylamine (CH<sub>3</sub>NH<sub>2</sub>) has been studied as an alternative to the ammonium species. This agent has a NH<sub>2</sub> molecule as part of its main composition. CH<sub>3</sub>NH<sub>2</sub> is desirable in NO<sub>x</sub> reduction primarily due to its low reaction temperature for the selective reduction process. CH<sub>3</sub>NH<sub>2</sub> reacts with NO closer to the diesel exhaust stream temperatures at around 573 K, compared to NH<sub>3</sub> and HNCO that begins to react with NO at around 1023 K [32]. Average diesel exhaust system temperatures were measured to be approximately 633 K [33]. The main decomposition reactions for CH<sub>3</sub>NH<sub>2</sub>, presented by Minkoff and Tipper, 1962, are shown below in equations 2.17 through 2.21 [34]:





From these species, the NO<sub>x</sub> reduction follows the NH<sub>2</sub> reactions from the Thermal DeNO<sub>x</sub> process mentioned above.

### 2.5.1 SCR

In recent implementations of selective reduction of NO<sub>x</sub> in diesel exhaust emissions on heavy duty engines, the addition of a reduction catalyst to the exhaust system has been common, specifically with aqueous urea as a reduction agent. The use of catalysts in selective reduction has dated back more than 50 years in stationary power systems, as reported by Mitsubishi Chemicals [35]. In SCR, the catalyst aids in the reduction in multiple ways. One way the catalyst aids selective reduction is in the decomposition of urea into NH<sub>3</sub> and HNCO. The typical temperature necessary for urea decomposition, as reported by Alzueta et al., is just below 1300 K, while complete decomposition of urea can occur with a catalyst at around 623 K [31]. With typical composition of a copper exchanged Zeolite Socony Mobil-5 (CuZSM5) catalyst, which is a common catalyst for SCR, the hydrolysis of HNCO can be as high as 95% conversion into NH<sub>3</sub> at a rapid rate at temperatures as low as 423 K [31].

In addition to aiding urea decomposition, SCR can theoretically remove NO<sub>x</sub> with 100% efficiency, or complete NO<sub>x</sub> reduction [36]. Studies completed on SCR have shown up to 80% NO<sub>x</sub> reduction at exhaust temperatures as low as 673 K without any additional emissions control, as reported in a numerical study by Hui, Boyan and Wang in 2014 [36]. In a 1993 study by Hug et al., up to 95% NO<sub>x</sub>, as well as over 50% CO and over 89% HC reduction is achievable through Urea-SCR when used in conjunction with additional emissions reducing devices such as oxidation catalysts and traps [35].

### 2.5.2 SNCR

Despite the recent implementation of SCR in automotive diesel exhaust, research and development of SNCR is still a popular topic among engineers. This continued push in SNCR technology is primarily due to the excessive costs and complexity of the SCR strategy. A noteworthy example is presented by Lyon in his 1987 report on Thermal DeNO<sub>x</sub>, where it points out the obvious cost difference in the two selective reduction techniques, showed then to be over \$1/lb NO<sub>x</sub> removed [28]. This main cost of SCR Lyon refers to comes with the metal catalysts such as CuZSM5, Vanadium Pentoxide (V<sub>2</sub>O<sub>5</sub>), or Tungsten Trioxide (WO<sub>3</sub>) / Titanium Dioxide (TiO<sub>2</sub>) used in stationary power production plants at the time.

In a flow reactor study conducted by Bowman and Hanson in 1997, NO<sub>x</sub> reduction of up to 80% was achieved with the injection of NH<sub>3</sub> into the chamber after the burner [27]. A flow reactor is a type of laboratory furnace in which gases can be introduced and temperature controlled precisely. Nam and Gibbs in 2012 conducted an experimental and kinetic model study of NH<sub>3</sub> reduction of NO<sub>x</sub> in a stainless steel flow reactor to simulate in-cylinder and exhaust pipe conditions [37]. That study showed a 34% reduction of NO<sub>x</sub> was achieved with a 1.5 molar ratio of reducing agent to NO<sub>x</sub> and an optimum temperate of 1240 K.

Miyamoto et al., in 1994, obtained up to 60% NO<sub>x</sub> reduction without an increase in smoke (PM and unburned HC) or BSFC by injecting aqueous urea while testing different ammonium compounds [38]. This was done by injecting the reducing agent directly into the cylinder of a single cylinder swirl chamber engine under a single load BMEP of 0.4 and at 500 rpm injected at multiple NH<sub>3</sub>/NO<sub>x</sub> ratios and injection timings. In 1998, Willand et al. conducted numerical simulation of aqueous urea injection into cylinder, as well as experimental injection into the immediate exhaust exit (top of the exhaust valve) at different NH<sub>3</sub>/NO<sub>x</sub> ratios and

injection timings [39]. This study showed that a 65%  $\text{NO}_x$  reduction is obtainable when aqueous urea was injected into the combustion chamber when exhaust temperatures were increased to 923 K by increasing backpressure. Hossain et al, in 2004 experimented with a pilot-scale diesel reactor to test injection of aqueous urea with a commercial grade sodium carbonate ( $\text{Na}_2\text{CO}_3$ ) additive [40]. The best results in that study showed that with a 5% addition of  $\text{Na}_2\text{CO}_3$  to aqueous urea solution, a reduction in  $\text{NO}_x$  of 69% was obtainable. This is due primarily from the effect of larger droplet size and respective “survivability” in high exhaust temperature allowing further  $\text{NO}_x$  reduction to take place. In 2006, Nam, et al. tested aqueous urea injection into a simulated diesel flow reactor, achieving  $\text{NO}_x$  reduction of 40-60% depending on normalized stoichiometric ratios (NSR) of reducing agent to  $\text{NO}_x$  [41]. A 2007 numerical evaluation using KIVA-3V code by Golovitchev, et al. was conducted on the reduction of  $\text{NO}_x$  from in-cylinder direct injection of aqueous urea [42]. In this simulation study, a Direct Water Injection (DWI) duel fuel injector was used to inject the aqueous urea directly into the flame plume during combustion. It was shown that  $\text{NO}_x$  was able to be reduced, hypothetically, by 80% with proper injection timing and optimized urea content of the solution.

In a 2003 study by Nakanishi et al., the injection of  $\text{CH}_3\text{NH}_2$  into a flow reactor attached to the exhaust of a single cylinder four-stroke, water cooled diesel engine was reported [34]. The reaction chamber incorporated an electric heater to sustain adequate temperatures for the reduction process. Results showed a 64% reduction in  $\text{NO}_x$  at a temperature range of 673-813 K and molar ratio of 1 without any additional reducing device and up to 80% with the addition of a pre-SNCR inline particulate filter. In another Methylamine study conducted by Xu et al. in 2011, an 80% reduction in  $\text{NO}_x$  at a 1.2  $\text{CH}_3\text{NH}_2$  to  $\text{NO}_x$  ratio at 693 K was obtained [32].

## **2.6 Important Factors**

In the selective reduction of  $\text{NO}_x$ , especially in SNCR, there are a number of important reaction conditions that must be met in order to achieve optimal reduction, as well as characteristics of particular importance in the reduction processes. These factors, are: temperature and pressure; reducing agent- $\text{NO}_x$  ratio; oxygen and radical content; residence time; and  $\text{NH}_3$  slip.

### **2.6.1 Temperature**

Perhaps the most critical reaction condition for SNCR to be effective is the temperature window at which it occurs. This becomes particularly important when addressing such factors as reducing agent, method in which the agent is introduced, and location in the combustion process where the agent is introduced. In Lyon's initial  $\text{NO}_x$  reduction strategy, it is indicated that the  $\text{NO}$  and  $\text{NH}_3$  reduction reactions takes place at 1123-1423 K [25]. The formation of  $\text{NH}_2$  from  $\text{NH}_3$  occurs at a "narrow temperature range around 1300 K" [38]. One factor in the temperature window is exhaust composition, specifically  $\text{O}_2$  content [43]. This window becomes increasingly important in  $\text{NO}_x$  reduction due to undesirable effects of too low or too high of a temperature. At low temperatures,  $\text{NH}_3$  doesn't react and passes through to the atmosphere. As temperatures approach and exceed the typical window, the reduction of  $\text{NO}_x$  decreased and may increase  $\text{NO}_x$  emissions from non-treated exhaust levels due to the oxidation of the  $\text{NH}_3$  [43]. According to most of the studies examined, the peak reaction occurs at around 1250 K [25, 38, 43].

### **2.6.2 Pressure**

Some studies on SNCR refer to the effect of pressure on the reduction reaction of  $\text{NO}_x$ . These studies seem to be contradictory. Kasuya et al. with a flow reactor experiment, concluded that higher pressures adversely effected the reduction  $\text{NO}_x$  due to excessive molar concentrations

of  $O_2$  [43]. While Bowman and Henson showed that in jet turbine exhaust elevated to 20 atm the  $NO_x$  reduction was about the same as 1 atm, and a widening of the reduction temperature window to 1200-1500 K with a peak reduction at around 1325 K at the higher pressure [27].

### **2.6.3 Reducing Agent/ $NO_x$ Ratio**

Ratio of reducing agent added to  $NO_x$  content in the exhaust in the selective reduction process are typically described as NSR or molar ratios. It has been shown that the ratio of reducing agent to  $NO_x$  and proper mixing plays an important role in reduction especially at different temperature levels and residence times [32, 34, 38, 39, 41]. In all studies examined, the average reducing agent /  $NO_x$  ratio that was most effective was between 1 and 4, with most finding the optimal ratio at around 1.5.

### **2.6.4 Oxygen and Radical Content**

Oxygen and radical content refer to the amount of  $O_2$ , O, H and OH available during the reduction process. In the prior discussion of  $NO_x$  formation and reduction mechanisms, these radical elements play a substantial role [4] [25, 27, 34, 43]. Specifically, the availability of excess oxygen and the role it plays on  $NO_x$  reduction as a function of  $O_2$ . A minimum of 2% available excess  $O_2$  is needed for reduction to occur [4]. Radicals of O, H, and OH begin to generate at temperatures over 923 K [34]. It is these radicals that combine and break down  $NO_x$  into  $N_2$  and  $N_2O$  [27].

### **2.6.5 Residence Time**

Residence time refers to the amount of time available for the reduction reactions to take place. Temperature effects the residence time requires as shown by Willand et al. [39]. The residence time usually depends on the speed of the exhaust gas. That is why, in most studies

examined, high rates of  $\text{NO}_x$  reduction are obtainable at lower engine speeds as seen in Miyamoto et al., 1995 [38].

#### **2.6.6 $\text{NH}_3$ Slip**

Another important factor in both SCR and SNCR is  $\text{NH}_3$  slip. This is when  $\text{NH}_3$  passed through unreacted. This is critical from an environmental stand point as  $\text{NH}_3$  emissions, though not regulated in the United States, are regulated in many other countries [44]. In addition, as a regulated emission,  $\text{NH}_3$  is considered hazardous to living creatures.  $\text{NH}_3$  slip is directly dependent on many factors in the reduction of  $\text{NO}_x$  emissions such as injection method and location, as well as configuration of the reducing process [44].



### 3 EXPERIMENTAL SETUP AND PROCEDURE

This experiment explored the in-cylinder SNCR of NO<sub>x</sub> emissions of a single cylinder diesel test engine while operating under two loads at low engine speed with the varying secondary injection timing and duration. This study focused on the testing of direct injection of secondary reducing agents being compared to baseline, diesel-only operation. NO<sub>x</sub> emissions from these tests will be compared in order to observe maximum reduction. In addition to the NO<sub>x</sub> emissions, maximum in-cylinder temperature and O<sub>2</sub> percentage of the emissions were observed. For the study, testing was carried out at the University of North Florida's Vehicles, Engines, Fuels, and Emissions Laboratory (VEFEL). A picture of the testing equipment and the overall testing configuration is shown in Figure 3.1. A complete table of all sensors and measuring equipment can be found in Appendix 1.

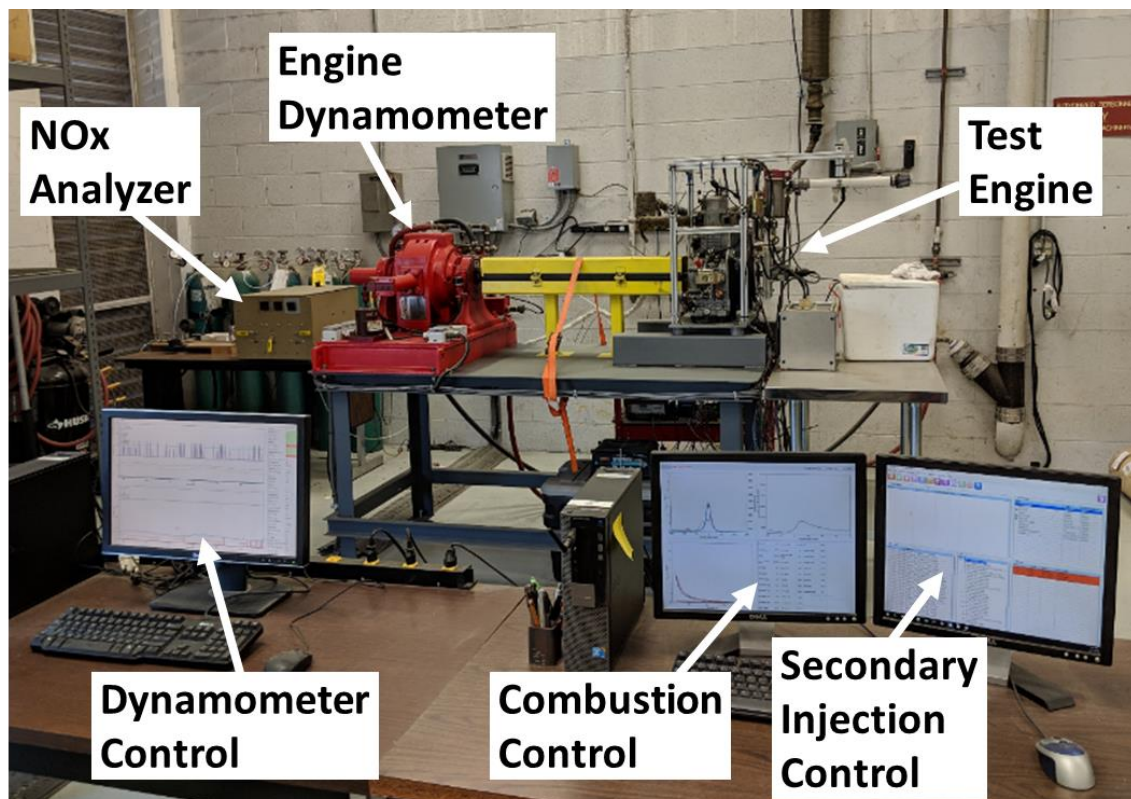


Figure 3.1 – Testing equipment at the University of North Florida's Vehicles, Engines, Fuels, and Emissions Laboratory

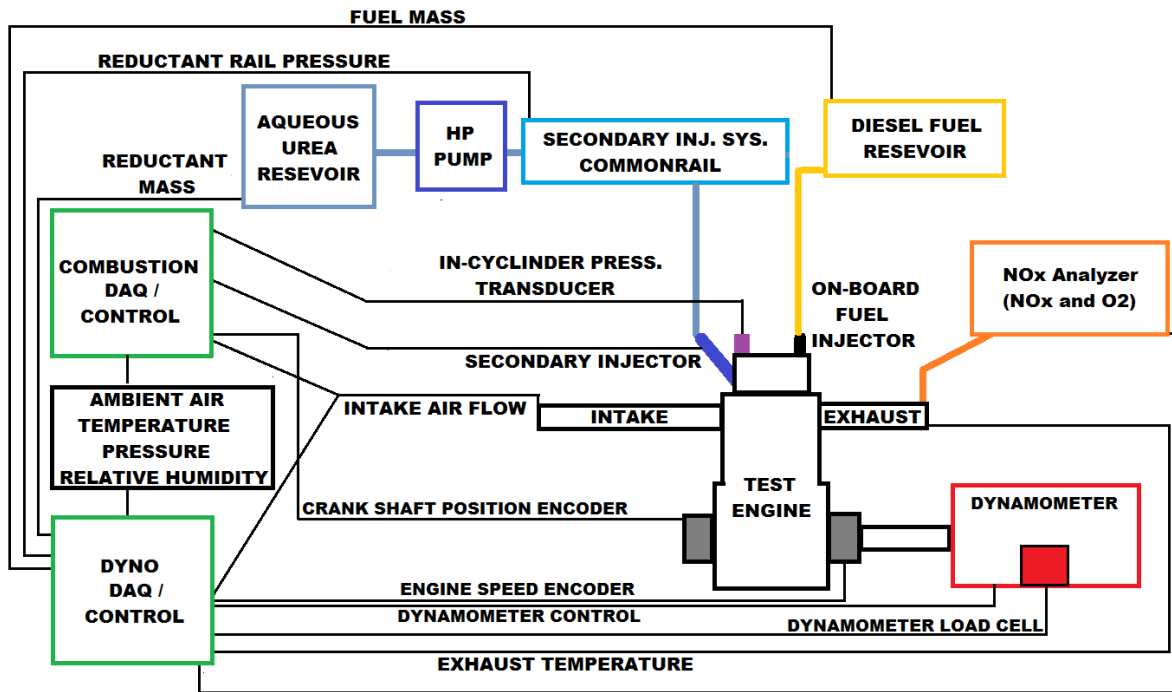


Figure 3.2 – Test Schematic

### 3.1 Test Fuels and Reducing Agent

#### 3.1.1 Diesel Fuel

For the diesel fuel, standard highway low-sulfur diesel provided from the University of North Florida on-site fuel station was utilized. All fuel used in the experiments were from the same single fill fuel storage container in order to maintain consistency of fuel properties between re-fueling. The main diesel fuel for engine operation was supplied by the stock mechanical primary fuel pump on the engine.

#### 3.1.2 Primary Reducing Agent / Aqueous Urea

The aqueous urea reducing agent was Peak<sup>®</sup> Blue<sup>®</sup> diesel exhaust fluid (DEF). DEF is 32.5% urea and 67.5% deionized water, by mass. This concentration of urea in water is standardized as aqueous urea solution 32 (AUS 32) in ISO 22241 [45].

### **3.1.3 Secondary Injection Testing Blends**

When implementing the secondary injection of aqueous urea, in order overcome lubricity issues with the repurposed VW diesel injectors, the primary reducing agent tested was an 80-20 blend by mass of aqueous urea and glycerol ( $C_3H_8O_3$ ). Due to the addition of glycerol to the aqueous urea, the test sequence for SNCR was repeated with an 80-20 water-glycerol blend, by mass, to determine the effects of the glycerol. Additionally, since the urea was in an aqueous solution, the effects of evaporative cooling and added energy capacity of the water on the reduction process were considered with a third reducing agent of neat water was also tested. This means, that in total, there were three different reducing agent blends (by mass) tested via the direct injection by the secondary injection system were:

1. 80-20 Aqueous Urea – Glycerol
2. 80-20 Water – Glycerol
3. Neat Water

### **3.2 Test Engine**

A Changfa Apollo CF186 air cooled four stroke CI engine (Figure 3.2) was used for this experiment. This engine is mechanically controlled by an on-board diesel fuel pump. The cylinder head of the engine was modified by machining additional ports which were added to equip the secondary injector as well as the in-cylinder pressure transducer. The test engine specifications are shown in Table 3.1. The test engine was also equipped with a custom exhaust that has been fitted with a heated sample probe for the  $NO_x$  analyzer. Attached in line with the engine shaft and dynamometer, a BEI Sensors, Express® displacement encoder, model H20 with 1440 pulses per revolution (PPR) resolution was used for engine crank shaft position.

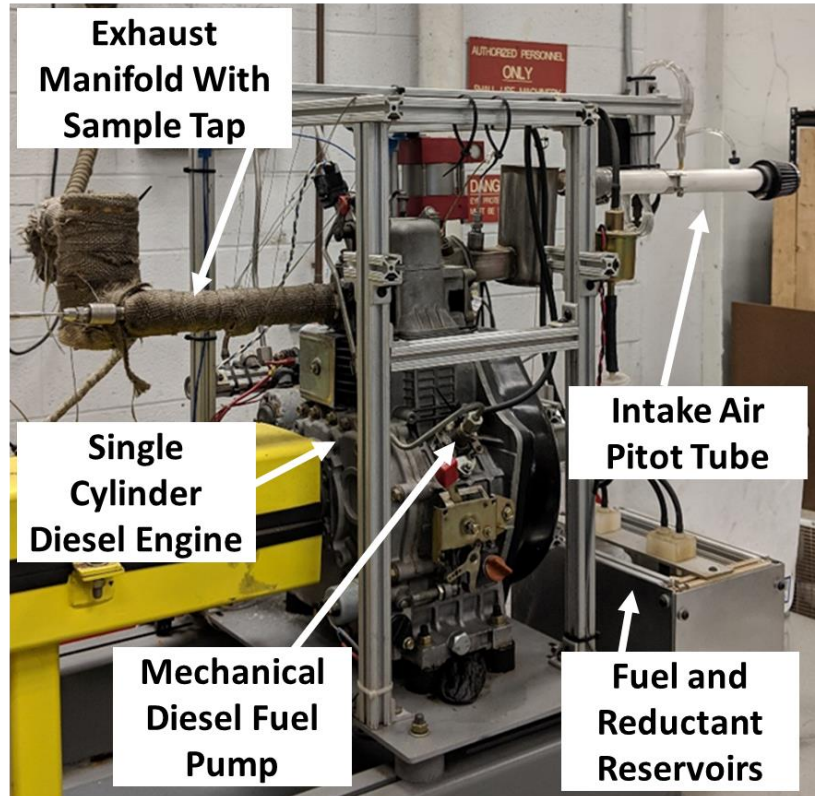


Figure 3.3 – Changfa Apollo CF186 single cylinder diesel engine

Table 3.1 – Test Engine Specifications

Engine Model	Changfa Apollo CF186
Engine Type	Air Cooled, Four Stroke
Bore and Stroke (mm)	86x72
Compression Ratio	19:1
Total Displacement (cm <sup>3</sup> )	418
Rated Speed (rpm)	3600
Rate Power (kW)	9.1
Intake	Natural Aspiration
Ignition Type	Compression Ignition
Primary Fuel Injection System	Pump Line Nozzle
Primary Fuel Injection Pressure	200 MPa
Secondary Injection System	Common Rail
Secondary Fuel Injection Pressure	500 MPa

### 3.3 Secondary Common Rail Injection System

A VW electrically controlled common rail diesel fuel injection system from a 2012 Jetta TDI was used for the secondary injection system, as shown in Figure 3.3. This system was used

to inject the reducing agent directly into the combustion cylinder for SNCR testing. This VW common rail injection system included the fuel common rail with pressure regulator valve and rail pressure transducer, as well as the fuel lines and diesel fuel injector. The stock injector supply line was replaced with a custom supply line to accommodate the changes in mounting location and geometry. Since the system is designed to deliver fuel for a turbocharged diesel engine, it was well suited for the secondary in-cylinder injection of aqueous urea into the test engine, and able to overcome the high in-cylinder pressures.

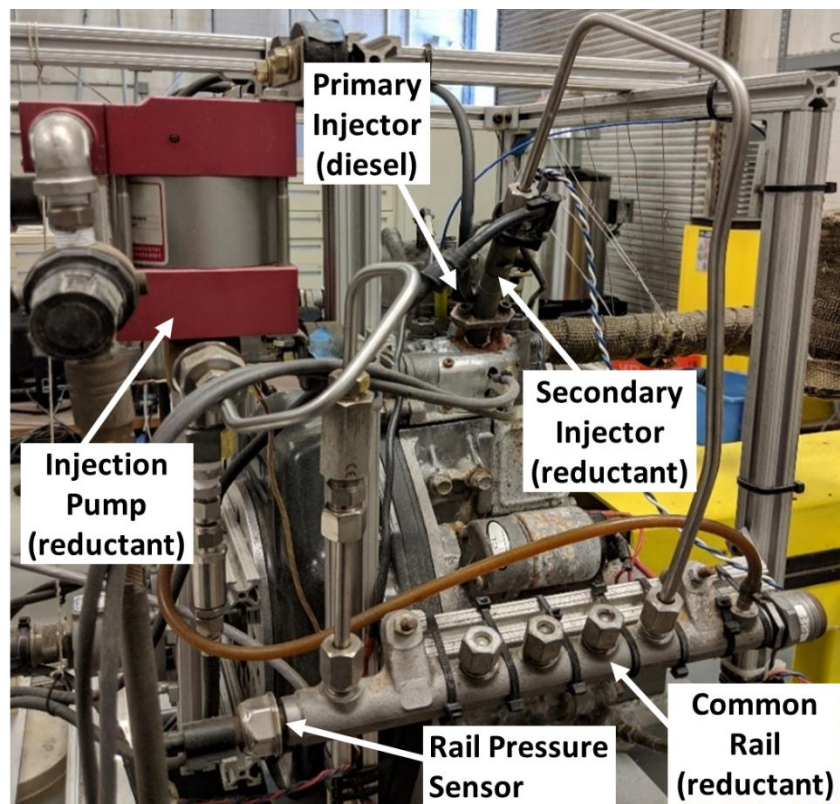


Figure 3.4 – VW common rail injection system used for secondary in-cylinder injection

The high-pressure pump used for supplying the aqueous urea to the common rail system is a Maxpro Technologies, Inc. MAXIMATOR® PP-189 VP air driven liquid pump. This pump has a maximum outlet pressure of 220 MPa, which worked suitably with the aqueous urea in-cylinder injection [46]. This high injection pressure was necessary to overcome in-cylinder



pressures at time of injection. Prior to the experiments, all the injectors were test benched with the aqueous urea-glycerol blend, the water-glycerol blend, and neat water in order to calibrate the mass injected as a function of injector pulse width.

### 3.4 Engine Dynamometer

To simulate engine loads and measure engine torque output, an eddy current dynamometer was installed in line with the test engine output shaft. The dynamometer that was used is a wet gap Dynamatic Absorbing Dynamometer Model 758 DG (Figure 3.4). This engine dynamometer has a maximum power rating of 50 hp, which will accommodate the 10 hp Changfa test engine. An additional encoder was installed on the dynamometer's opposing shaft to record engine speed.

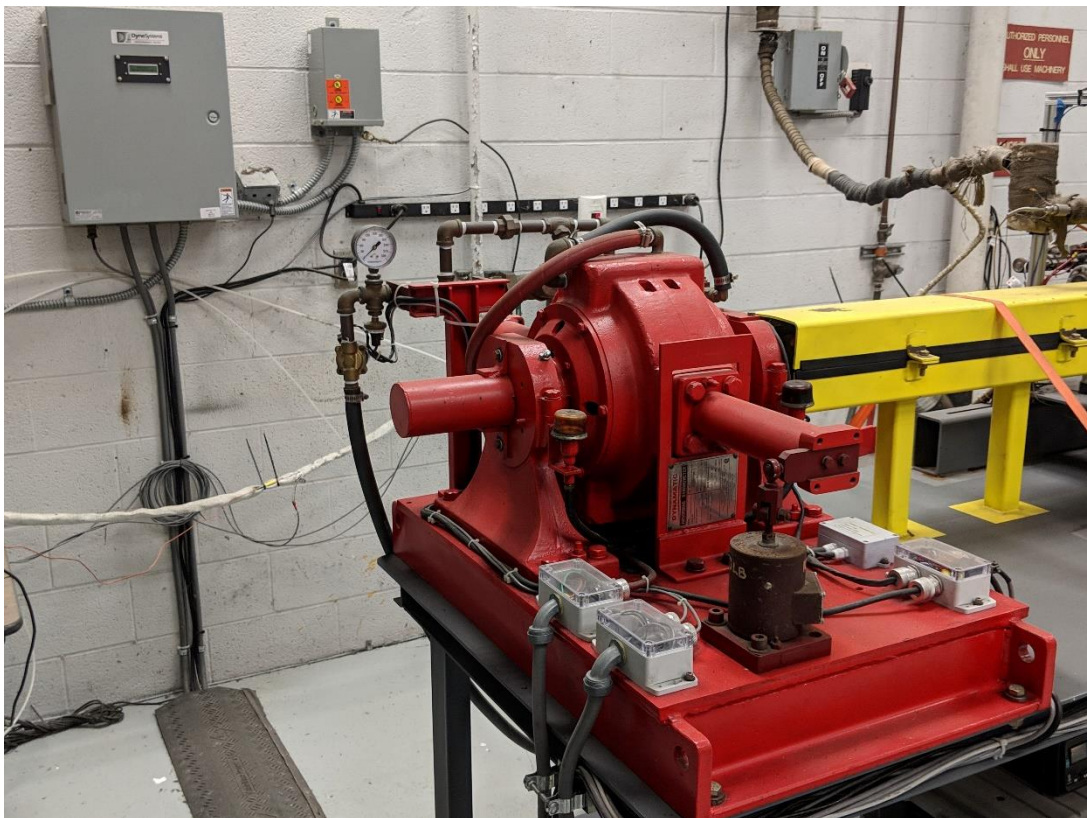


Figure 3.5 – Dynamatic Absorbing Dynamometer Model 758 DG

### 3.5 NO<sub>x</sub> Analyzer

The NO<sub>x</sub> analyzer used in this study is a custom-made in-house device using a Ford NO<sub>x</sub> sensor and control module, as shown in Figure 3.5. These sensors are common to multiple existing automotive emissions applications available on the market today, such as automotive diesel SCR exhaust systems. The analyzer included two valve selectable flow paths with catalysts for the measurement of NO<sub>x</sub> and NO<sub>x</sub> + NH<sub>3</sub> and by subtraction, a measurement of NH<sub>3</sub> was obtained. This sensor can identify said gas composition to 1 ppm and has been tested in-house to have an accuracy of within 2% when measuring NO compared to calibration gases [47].



Figure 3.6 – In-house NO<sub>x</sub> analyzer

The in-house NO<sub>x</sub> analyzer was calibrated for accuracy prior to connection to the test engine exhaust stream was made. The calibration was done using laboratory grade samples of N<sub>2</sub>, O<sub>2</sub>, NO, NO<sub>2</sub>, and NH<sub>3</sub>. Each bottle of these calibration gases were certified Primary Standard grade and were to +/- 2% accuracy of composition. In addition to initial calibration,

zero and span tests were performed in between each trial in order ensure NO<sub>x</sub> measurement accuracy.

### **3.6 Data Acquisition and Monitoring**

The testing apparatus was split into two separate control and data acquisition (DAQ) systems: Dynamometer and Combustion. Each system utilizes a custom written Python control and data collection program.

#### **3.6.1 Dynamometer DAQ System**

The dynamometer DAQ system controlled both engine and dynamometer operation, as well as recording input data from the engine and dynamometer. Additionally, for this experiment the Dynamometer DAQ system was utilized in the monitoring of NO<sub>x</sub> emissions and O<sub>2</sub> percentage in the exhaust stream, as well as intake and exhaust flow rates. Table 3.2 shows the control functions, data acquired and data calculated of the dynamometer DAQ system.

Table 3.2 – Dynamometer DAQ system data acquired and control function



Function Control	Data Monitored	Data Calculated
Dynamometer Load Control (variable control)	Time (s)	Engine Power (W)
Diesel Fuel Supply Pump (on/off)	Dynamometer System Status (disabled/enabled)	BMEP (kPa)
Engine Starter (on/off)	Engine Speed (rpm)	Intake Air Flowrate (g/s)
Exhaust Blower (on/off)	Engine Torque (N-m)	Diesel Fuel Flowrate (g/s)
	Engine Oil Pressure (kPa)	Air to Fuel Ratio (-)
	Engine Oil Temperature (°C)	Exhaust Mass Flowrate (g/s)
	Ambient Air Pressure (kPa)	Exhaust Molar Flowrate (mol/s)
	Ambient Air Temperature (°C)	NO <sub>x</sub> Exhaust Mass Flowrate (g/s)
	Intake Air Pressure (kPa)	CO <sub>2</sub> Exhaust Mass Flowrate (g/s)
	Intake Air Flow Pitot Tube (ΔPa)	
	Intake Air Temperature (°C)	
	Secondary Injection Rail Pressure (bar)	
	Reductant Reservoir Mass (g)	
	Diesel Fuel Reservoir Mass (g)	
	NO <sub>x</sub> Exhaust Concentration (ppm)	
	O <sub>2</sub> Exhaust Concentration (%)	
	CO <sub>2</sub> Concentration (%)	
	Relative Humidity (%)	

### 3.6.2 NO<sub>x</sub> Emission Mass Flow Rate

Part of the dynamometer DAQ system was the calculation of NO<sub>x</sub> mass flow rate (g/s) which comes from the conversion of NO<sub>x</sub> concentration measured by the NO<sub>x</sub> analyzer as per the Code of Federal Regulations (CFR), section 40, part 1065 shown in Equation 3.1 [48]. In order to calculate NO<sub>x</sub> mass flow rate, the molar mass (M) of NO<sub>x</sub>, corrected concentration and the exhaust molar flow rate were required. From the CFR, the NO<sub>x</sub> concentration was corrected for intake air temperature and humidity (40 CFR equation 1065.670-1). This correction aids in

taking into account the ambient conditions effect on NO<sub>x</sub> formation and reduction. The exhaust molar flow rate was found using a chemical balance (40 CFR equation 1065.655-20) based on the intake air flow from an averaging pitot tube and on the fuel flow from a scale. It should be noted that UNF's VEFEL used the CFR 1065 as a guidance but was not a CFR 1065 compliant laboratory.

$$\dot{m}_{NOx} = M_{NOx} x_{NOx,cor} \dot{n}_{exh} \quad \text{Equation 3.1}$$

Mass flow rate of NO<sub>x</sub> is found by multiplying the molar weight by the corrected NO<sub>x</sub> concentration and exhaust molar flow rate, as per the CFR Section 40 Part 1065

### 3.6.3 Combustion DAQ System

The combustion DAQ system's primary function was to monitor combustion while controlling the secondary injection system. Table 3.3 shows the functions controlled, data collected, and data calculated by the combustion DAQ system.

Table 3.3 – Combustion DAQ system data acquired and control function

Function Control	Data Monitored	Data Calculated
Injection Start Time (°ATDC)	Crank Angle (° ATDC)	Intake Air Flow (kg/min)
Length of Injection (°)	Exhaust Temperature (K)	Exhaust Flow (kg/min)
	Maximum In-Cylinder Pressure (kPa)	Air to Fuel Ratio (-)
	Ambient Air Pressure (kPa)	IMEP (kPa)
	Ambient Air Temperature (°C)	Average In-Cylinder Temperature (K)

### 3.6.4 Single Zone In-Cylinder Combustion Model

To observe the average in-cylinder temperature ( $T_{cyl}$ ), a single zone model calculation was used based on the ideal gas law, shown in Equation 3.2, and then rearranged to find the average in-cylinder temperature in Equation 3.3. The mass and the gas constant were found by assuming that the in-cylinder pressure and temperature were the same as the intake pressure and temperature at inlet valve closing. In addition, the continuously measured in-cylinder pressure and the calculated cylinder volume based on crank angle were used to find the average in-

cylinder temperature. This single zone model provides a way to monitor theoretic average in-cylinder temperature based on the cylinder pressure during combustion. This temperature was used to observe and gage the appropriate temperature window for the SNCR reactions.

$$P_{cyl}V_{cyl} = m_{cyl}RT_{cyl}$$

Ideal gas law. Equation 3.2

$$T_{cyl} = \frac{(PV)_{in-cyl}}{(mR)_{inlet}}$$

Ideal gas law rearranged to solve for in-cylinder temperature. Equation 3.3

### 3.7 Test Sequence and Method

#### 3.7.1 Scoping

Prior to carrying out the experiments, preliminary baseline scoping tests were operated at both engine loads to determine the baseline NO<sub>x</sub> concentration in order to calculate the amounts of reducing agent to NO<sub>x</sub> emissions (NH<sub>3</sub>/NO<sub>x</sub>) molar ratios.

#### 3.7.2 Baseline Testing

In order to establish proper baseline data for the percent reduction of NO<sub>x</sub> comparison, multiple baseline (BL) tests were performed. These baselines tests were carried out at the start of each set of tests, as well as in between and after each change in the length of injection (LOI) or NH<sub>3</sub>/NO<sub>x</sub> molar ratio test sets. This means that for the four molar ratios tested, a before and after baseline test was performed. This was repeated for each reducing agent and for both loads tested. The purpose of the interstitial or “in-between” baseline tests was to reduce the influence of the varying engine and environmental conditions and give a precise percent reduction of NO<sub>x</sub>.

Additionally, the complete set of baselines for each load were compiled for each load and analyzed for variation and repeatability. For each load tested, the average, standard deviation, maximum, minimum, range, as well as the 95% confidence intervals were found. From the

maximum and minimum, the baseline NO<sub>x</sub> levels significance for the reduction results were determined.

### **3.7.3 SNCR Engine Operation**

Based on the baseline engine test data, such as in-cylinder temperature, pressure, residence time, and NO<sub>x</sub> concentration, a secondary aqueous urea injection strategy was implemented for the SNCR operation tests. The SNCR operation tests included testing of the two different variables: start of secondary injection and secondary injection duration (molar ratio of NH<sub>3</sub>/NO<sub>x</sub>). For all tests, secondary injection pressure was held constant at 500 bar.

### **3.7.4 Test Modes**

Each set of tests, for baseline and SNCR operation consisted of the following engine loads and speeds:

1. 40% Load / 1500 rpm
2. 80% Load / 1500 rpm

These engine loads were chosen to provide a spectrum of typical diesel engine load ranges, low and high.

For SCNR operation, the control variables for the secondary reducing agent injection were the start of injection (SOI) and the LOI. For each secondary reducing agent tested, an assortment of SOI timings were chosen to create a range over the combustion stroke. The chosen SOI timings were -30°, 0°, 10°, 20° and 60° after top dead center (ATDC). For NH<sub>3</sub>/NO<sub>x</sub> molar ratio, the molar ratios of 0.5, 1.0 and 4.0 were tested by means of changing the LOI. In total 75 tests were performed (Table 3.4), for each load tested. A daily engine warm up period was performed prior to the start of each testing day. Each test was operated for five minutes in order to allow steady state operation. From each test, the last two minutes of data was analyzed. The

baseline tests were performed before and after each set of five molar ratio tests in order to observe relative baseline characteristics for each subset of tests.

Table 3.4 – The testing variables of NH<sub>3</sub>/NO<sub>x</sub> molar ratio and start of injection for each secondary injection blend

Urea / Glycerol (80/20)			Water / Glycerol (80/20)			Water Only		
Test #	NH <sub>3</sub> /NO <sub>x</sub>	SOI (ATDC)	Test #	NH <sub>3</sub> /NO <sub>x</sub>	SOI (ATDC)	Test #	NH <sub>3</sub> /NO <sub>x</sub>	SOI (ATDC)
1	BL		26	BL		51	BL	
2	4	60	27	4	60	52	4	60
3	4	20	28	4	20	53	4	20
4	4	10	29	4	10	54	4	10
5	4	0	30	4	0	55	4	0
6	4	-30	31	4	-30	56	4	-30
7	BL		32	BL		57	BL	
8	2	60	33	2	60	58	2	60
9	2	20	34	2	20	59	2	20
10	2	10	35	2	10	60	2	10
11	2	0	36	2	0	61	2	0
12	2	-30	37	2	-30	62	2	-30
13	BL		38	BL		63	BL	
14	1	60	39	1	60	64	1	60
15	1	20	40	1	20	65	1	20
16	1	10	41	1	10	66	1	10
17	1	0	42	1	0	67	1	0
18	1	-30	43	1	-30	68	1	-30
19	BL		44	BL		69	BL	
20	0.5	60	45	0.5	60	70	0.5	60
21	0.5	20	46	0.5	20	71	0.5	20
22	0.5	10	47	0.5	10	72	0.5	10
23	0.5	0	48	0.5	0	73	0.5	0
24	0.5	-30	49	0.5	-30	74	0.5	-30
25	BL		50	BL		75	BL	

## 4 RESULTS AND DISCUSSION

### 4.1 Preliminary Baseline Scoping

From the preliminary scoping, two NO<sub>x</sub> measurements were observed. The 40% engine load (5 N-m) baseline series produced an approximate 250 ppm or 0.00434 g/s NO<sub>x</sub>, and the 80% engine load (10 N-m) baseline series produced an approximate 500 ppm or 0.0114 g/s NO<sub>x</sub>.

From these values the LOI or amount of the SNCR (Aqueous Urea-Glycerol) reducing agent was determined for each of the four molar ratios tested.

### 4.2 Baseline Tests

From the collective of baseline tests performed statistical data was found as shown in Table 4.1. A 95% confidence interval, as well as a maximum and minimum values in order to assess engine repeatability and NO<sub>x</sub> level significance, respectfully. The percent difference of the 95% confidence interval from the average was used to access whether an increase or decrease in the NO<sub>x</sub> was a significant change.

Table 4.1 – Baseline test average, standard deviation, maximum, minimum, 95% confidence interval, and the percent difference of the 95% confidence interval from the average

Load	Average (g/s)	Standard Deviation (g/s)	Maximum (g/s)	Minimum (g/s)	95% Confidence Interval	Percent Difference
40%	0.0042	0.0004	0.0049	0.0034	± 0.0002	5%
80%	0.0118	0.0030	0.0123	0.0113	± 0.0015	13%

### 4.3 SNCR 40% Load (5 N-m) Results

The following results are for the three reducing agents tested at 40% engine load (5 N-m) and 1500 rpm. As previously stated, each reducing agent test sequence was broken into four sub-series for each of the four molar ratios tested. The NO<sub>x</sub> level results of each test was compared to the average of the before and after interstitial sub-series baseline tests NO<sub>x</sub> levels.

#### 4.3.1 80-20 Aqueous Urea-Glycerol Injection (40% Load)

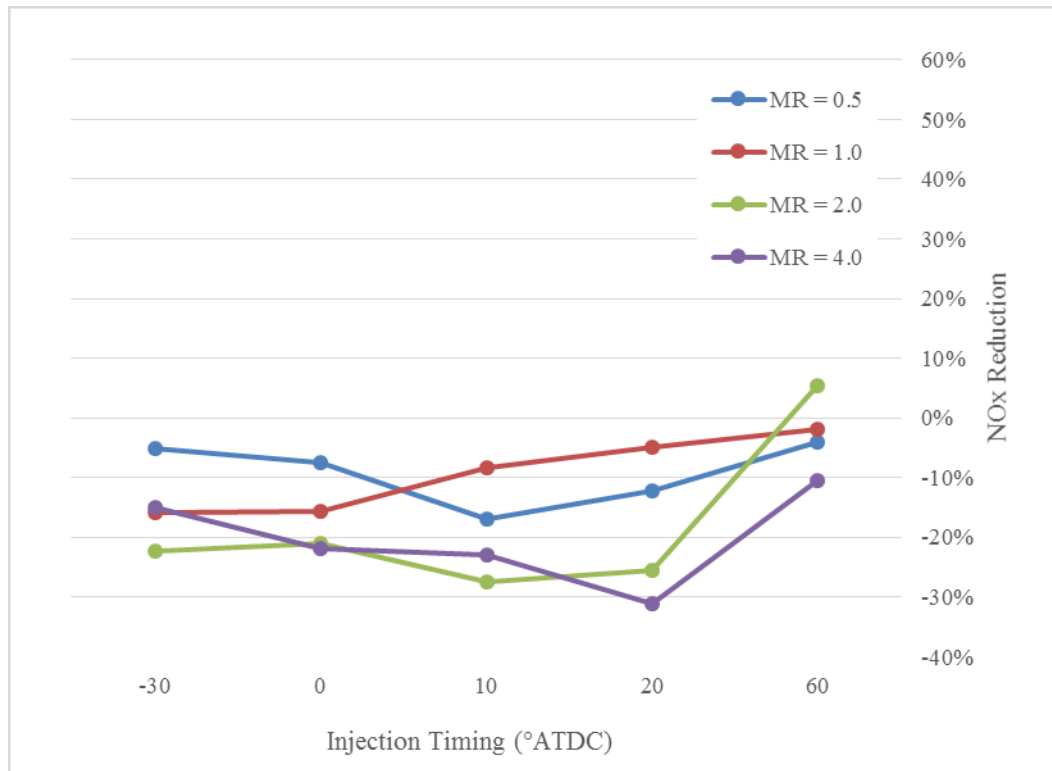


Figure 4.1 – 40% load 80-20 aqueous urea-glycerol SNCR NO<sub>x</sub> reduction results for the different molar ratios tested

Figure 4.1 shows the percentage of NO<sub>x</sub> reduction percentage for each NH<sub>3</sub>/NO<sub>x</sub> molar ratio tested (0.5, 1.0, 2.0 and 4.0) plotted against each injection timing tested (-30°, 0°, 10°, 20° and 60° ATDC). Each colored line on the graph is one of the four molar ratios tested. It was observed from this trial that under the test conditions, a maximum NO<sub>x</sub> reduction of 5% was observed for the 2.0 ratio test at the 60° ATDC injection timing. Unfortunately, this reduction is within the 95% confidence baseline level threshold and thus deemed insignificant. For all of the other tests for this reductant series showed an increase in NO<sub>x</sub> emissions that ranged from 2% to 31%. Though no significant reduction was observed in this series, it was noted that the 2.0 and 4.0 molar ratio series showed a higher increase in NO<sub>x</sub> production versus the 0.5 and 1.0 molar ratio series, overall. Additionally, of all the molar ratios tested, that the best reduction, or in this case, least in increase came from SOI of 60 degrees ATDC.

#### 4.3.2 80-20 Water-Glycerol Injection (40% Load)

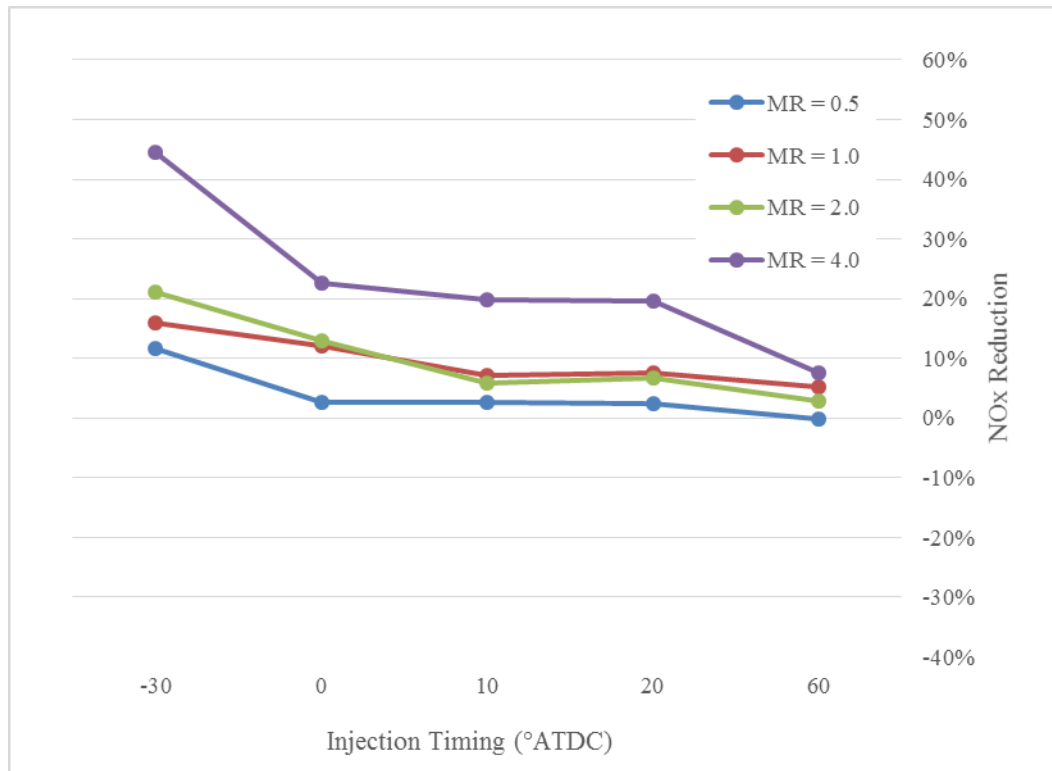


Figure 4.2 – 40% load 80-20 water-glycerol NO<sub>x</sub> reduction results for the different molar ratios tested

In order to determine the effects of the mixing of the aqueous urea with glycerol, the tests were repeated with the 80-20 water-glycerol mixture. Figure 4.2 shows these 80-20 water-glycerol tests under 40% load. For these 40% load experiments, a maximum reduction of NO<sub>x</sub> by 44% was achieved with the 4.0 molar ratio at -30° ATDC, when compared to the interstitial baseline average. Additionally, the 4.0 molar ratio sub-series produced the best overall reduction of all the molar ratios tested in this series. Subsequently, the reduction of NO<sub>x</sub> increased as the reductant molar ratio was increased. This is consistent with the increase in evaporative cooling effect and increased heat capacity available from the water and glycerol. Of all the molar ratios tested in the series, the reduction decreased as injection timing was progressed (earlier to later). This indicates that the evaporative cooling effect of the water and glycerol was more effective



prior to the combustion of the primary fuel. As a result, it was clear that the mixing with glycerol was not solely responsible for the lack of reduction from the aqueous urea.

#### 4.3.3 Neat Water Injection (40% Load)

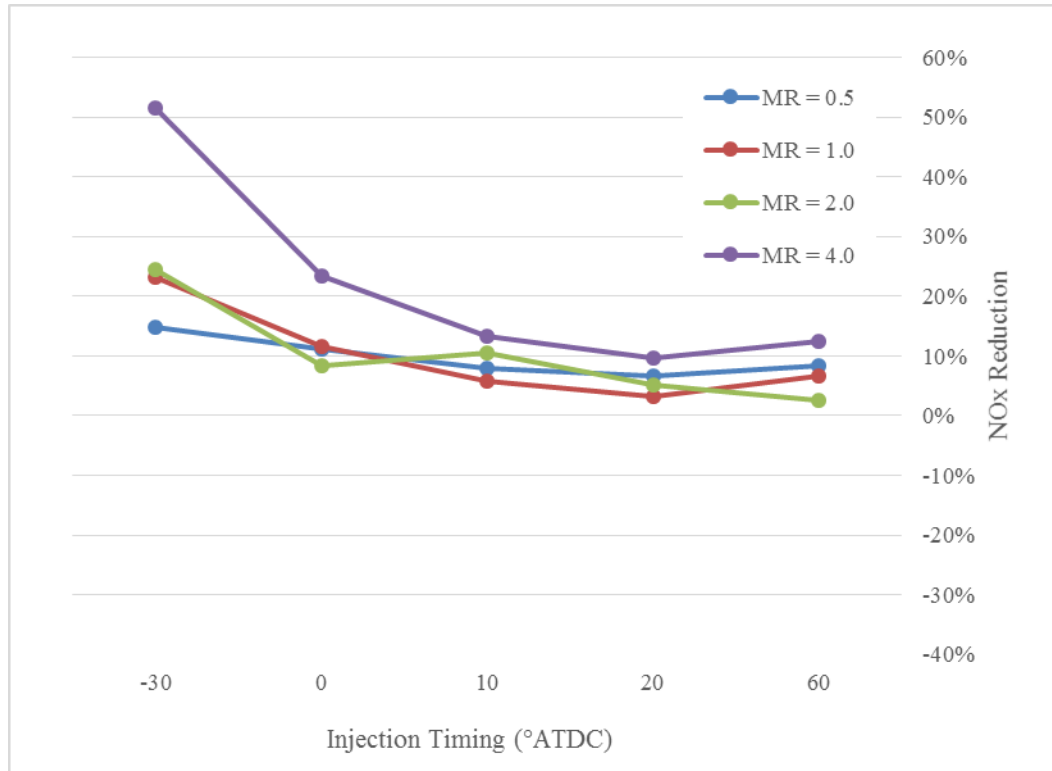


Figure 4.3 – 40% load neat water NO<sub>x</sub> reduction results for the different molar ratios tested

Like the water-glycerol tests, neat water was also tested in place of the reducing agent in order to determine the effects of reduction by evaporative cooling and increased heat capacity made available from the secondary injection of water alone. Figure 4.3 shows the results of the 40% load experiment repeated with neat water. The data shows a maximum decrease of NO<sub>x</sub> occurring at the 4.0 molar ratio and at the -30° ATDC injection timing with a 51% reduction when compared to interstitial baseline NO<sub>x</sub> levels. Similar to the 40% load water-glycerol test series, this occurred when injecting the most reductant, and at earliest injection timing. Similarly, the reduction of NO<sub>x</sub> increased as molar ratio was increased, except at the 0° ATDC, where the

1.0 and 0.5 molar ratio outperformed the 2.0 molar ratio; however, these results fell within the 95% confidence interval for the baseline and were thus deemed insignificant. In fact the trends of the sub-series tests for the neat water follow closely to the water-glycerol, all but the 2.0 molar ratio, but again these results were found to be insignificant due to the 5% baseline variation.

#### 4.4 SNCR 80% Load (10 N-m) Results

The following results are for the three reducing agent performed at 80% engine load (10 N-m) and 1500 rpm at their respective molar ratios. These 80% load experiments followed the same format as the 40% load experiment in the previous subsection.

##### 4.4.1 80-20 Aqueous Urea-Glycerol Injection (80% Load)

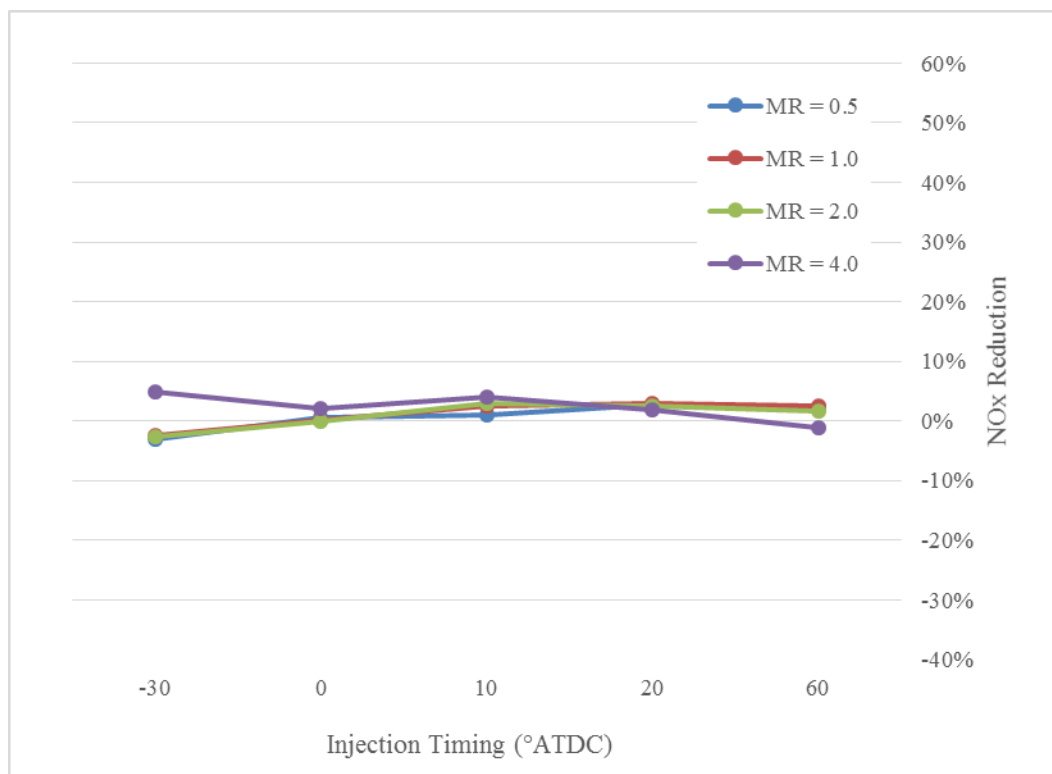


Figure 4.4 – 80% load 80-20 aqueous urea-glycerol SNCR NO<sub>x</sub> reduction results for the different molar ratios tested

The results of the 80-20 aqueous urea-glycerol 80% load tests are shown in Figure 4.4. Similar to 40% load tests, the 80% load tests with the 80-20 aqueous urea-glycerol mixture failed to show any significant reduction in NO<sub>x</sub> levels. Similarly a maximum of 5% reduction was

achieved at the 4.0 molar ratio and at early injection ( $-30^\circ$  ATDC). The increased load did produce more consistent results, all within the  $\pm 13\%$  from the 95% confidence interval baseline  $\text{NO}_x$  levels versus the like 40% load test, but again were well within the 95% confidence interval baseline variance and deemed insignificant. Additionally, no noticeable trends for molar ratio or injection timing were observed.

#### 4.4.2 80-20 Water-Glycerol Injection (80% Load)

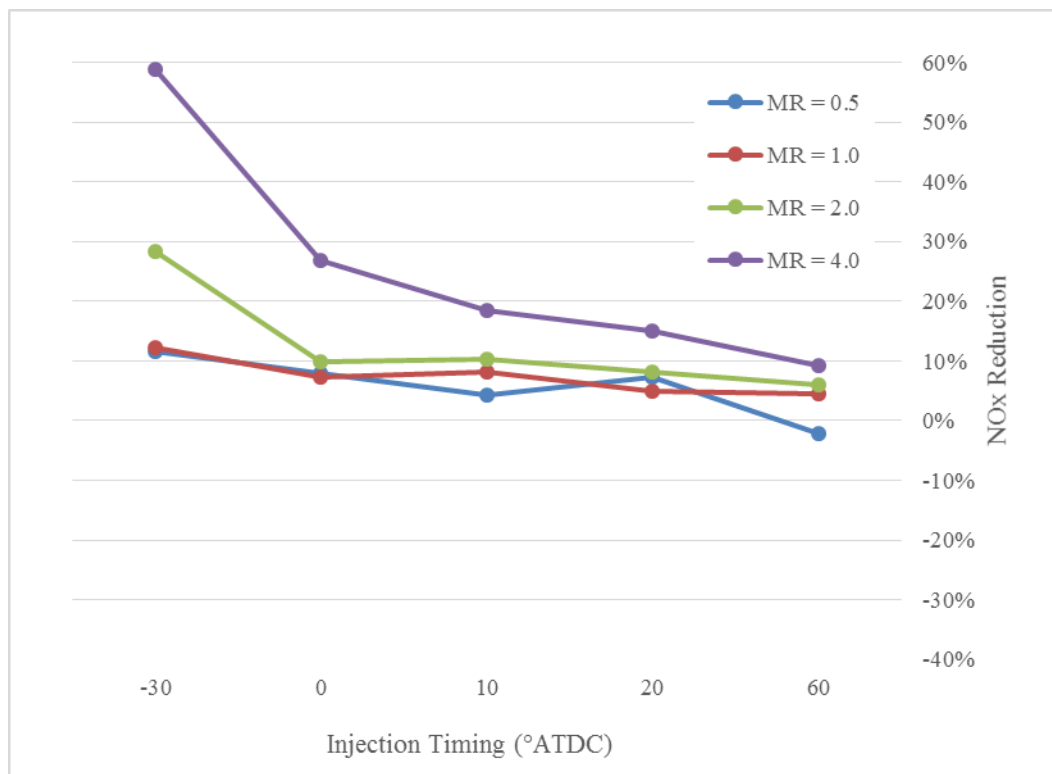


Figure 4.5 – 80% load 80-20 water-glycerol  $\text{NO}_x$  reduction results for the different molar ratios tested

Figure 4.5 shows the results of the 80% load 80-20 water-glycerol tests. The 80% load water-glycerol tests, similar to the 40% load tests, resulted in a much more significant reduction of  $\text{NO}_x$  emissions, especially in the 4.0 and 2.0 molar ratio test sub-series. Under the higher load, a maximum reduction of  $\text{NO}_x$  of 59% was achieved at the 4.0 molar ratio and early injection timing of  $-30$  degrees ATDC. The 2.0 molar ratio early injection timing also yielded a significant maximum reduction of  $\text{NO}_x$  by 28%, followed by the 1.0 and 0.5 molar ratios both at 12% (not

significant, but close). Again, similar to the 40% load tests the reduction of NO<sub>x</sub> decreased as molar ratio was decreased and injection timing increased, all except the 1.0 and 0.5 molar ratio sub-series. The 1.0 and 0.5 molar ratio sub-series had some irregularities in this trend at the 10° and 20° ATDC injection timings, although at these instances the reduction was within the 95% confidence interval for the baseline and therefore deemed insignificant.

#### 4.4.3 Neat Water Injection (80% Load)

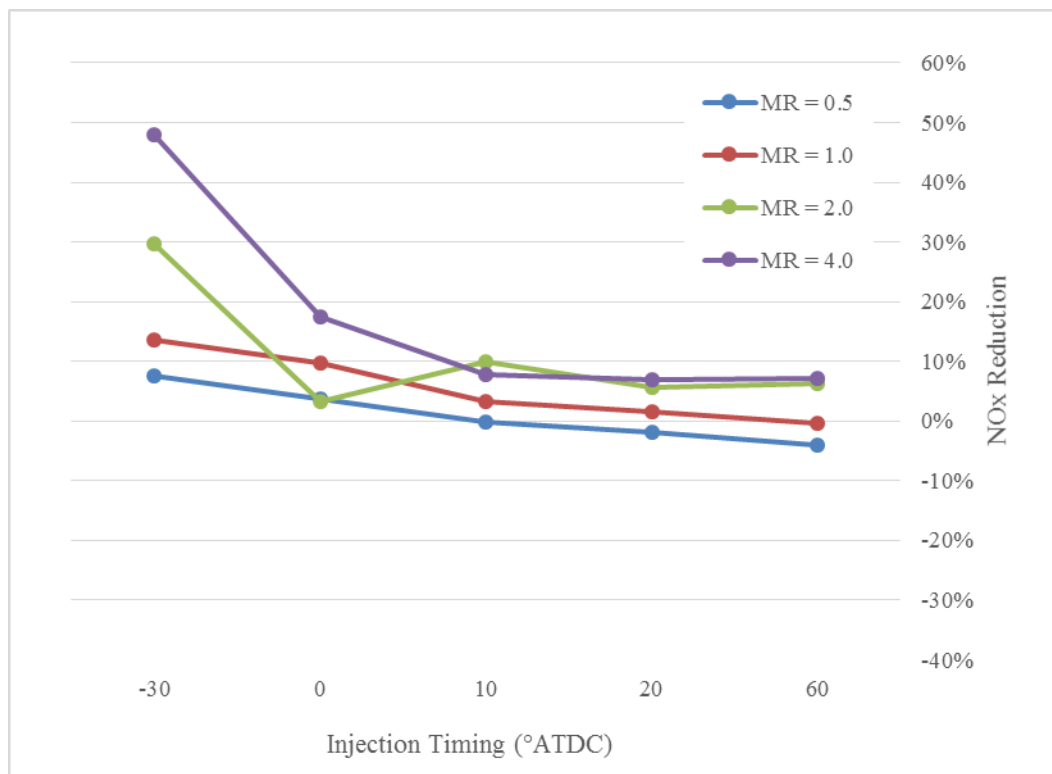


Figure 4.6 – 80% load neat water NO<sub>x</sub> reduction results for the different molar ratios tested

Figure 4.6 shows the 80% load neat water tests. With neat water, a maximum reduction of NO<sub>x</sub> of 51% was achieved with the 4.0 molar ratio and at early injection (-30° ATDC). Again, across the molar ratio sub-series tests, early injection timings yielded the highest reductions. The 2.0 molar ratio produced a maximum reduction of 28% NO<sub>x</sub>, 13% reduction by the 1.0 molar ratio and 8% reduction (not significant) by the 0.5 molar ratio. All the molar ratio sub-series followed the decreasing reduction as injection timing was increased except for the 2.0 molar

ratio. The 2.0 molar ratio defied this common trend and underperformed when compared to the other molar ratios at the 0° ATDC injection timing and outperformed the group at the 10° ATDC injection timing. One additional irregularity for this neat water test set was that the 1.0 and 0.5 molar ratio sub-series showed an increase in NO<sub>x</sub> of up to 3%, but these few results were found to be within the 95% confidence interval baseline variance and so insignificant.

#### **4.5 Reducing Agent**

From the performed tests under both 40% and 80% loads, it is clear that the desired effect of SNCR by means of aqueous urea, or in this case the 80-20 aqueous urea-glycerol mixture, was not achieved. Of the reducing agents tested in this experiment, the maximum reduction was achieved by neat water for the 40% by the 80-20 water-glycerol mixture for the 80% load with maximum NO<sub>x</sub> reduction of 51% and 59%, respectively.

The testing of the two alternative reducing agents were to establish the effects on reduction of the glycerol used in the mixture and that of the evaporative cooling effect of the water. Based on these results, the effects of glycerol mixture was beneficial due to the increase in NO<sub>x</sub> reduction in the 80% load tests by 9% when comparing the water and water-glycerol; however, the reduction by the evaporative cooling effect of the water was obvious in both the 40% and 80% load tests with the significant reduction in NO<sub>x</sub> for both load's sub-series.

#### **4.6 Molar Ratio**

Based on the results of the experiments conducted, the highest NO<sub>x</sub> reduction was achieved by the 4 to 1 molar ratio in all but one set of tests, the 40% load 80-20 aqueous urea-glycerol tests. For the others, this is consistent with evaporative the cooling effect caused by water during combustion, and thus reducing the formation of NO<sub>x</sub>. The maximum reduction

achieved at the 4 molar ratio was found to be 59%. Unfortunately, since the desired results of SNCR was not achieved, the effect of molar ratio therein cannot be commented upon.

#### **4.7 Injection Timing**

Similar to the molar ratio, all but one set of tests yielded early injection, or -30 degrees ATDC, as the most beneficial for  $\text{NO}_x$  reduction. This is likely due to the additional time given for the evaporative cooling effect of the water to take place. The one set of tests that did not follow this trend was the 40% load 80-20 aqueous urea-glycerol tests. The maximum reduction achieved at -30 degrees ATDC was 59%.

#### **4.8 Temperature Window**

In addition to the  $\text{NO}_x$  reduction comparison of each tests, average in-cylinder temperature ( $T_{\text{cyl}}$ ) by crank angle was monitored for all tests. The maximum value of  $T_{\text{cyl}}$  for the 40% and 80% load tests were determined to be 899 K and 1063 K, respectfully. It should be noted that the local temperatures inside the cylinder could be as high as the adiabatic flame temperature or as low as the cylinder wall temperature.

For the 40% load tests, the maximum  $T_{\text{cyl}}$  value of 899 K falls below the temperature needed to achieve SNCR by means of aqueous urea. This is most likely the explanation of why the 80-20 aqueous urea-glycerol tests had an adverse effect and increased  $\text{NO}_x$  rather than achieving a reduction. Figure 4.7 shows the temperature over the start of combustion where the SNCR testing took place for the 40% load baseline and the target temperature window for reduction to occur.

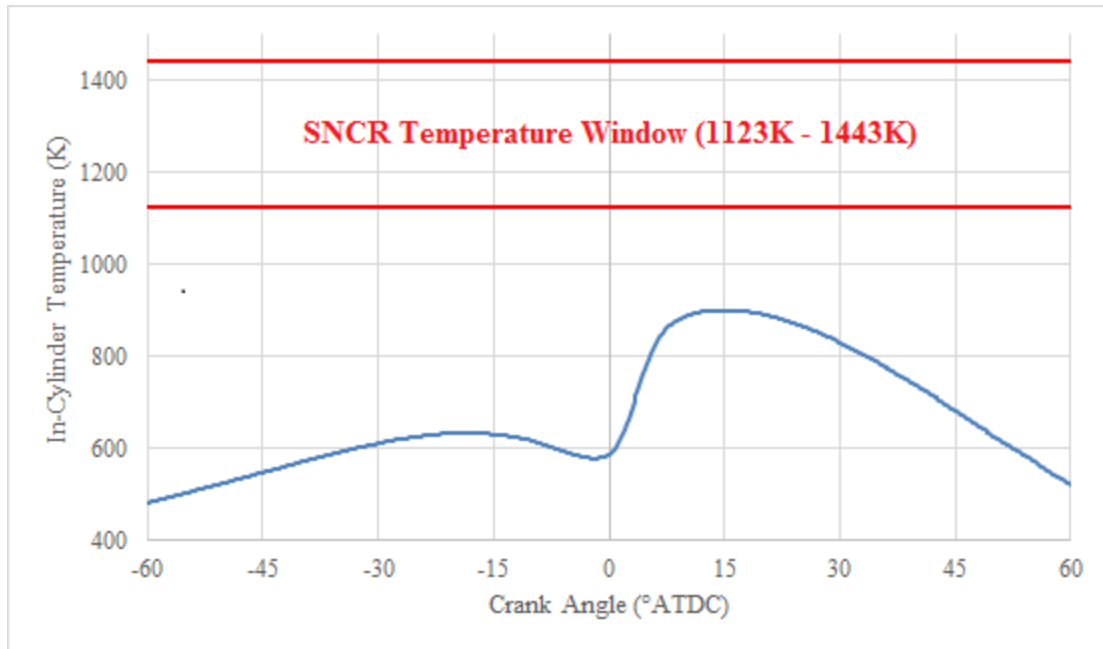


Figure 4.7 – Average in-cylinder temperature over the secondary injection window for the 40% load tests

The 80% load tests maximum  $T_{cyl}$  temperature of 1064 K again falls below the desired temperature window reported by Lyons of 1123-1423 K [25]. This would explain the slightly better performance when compared to the 40% load tests, but still poor SNCR  $NO_x$  reduction. Figure 4.8 shows the temperature over the start of combustion where the SNCR testing took place for the 80% load baseline and the target temperature window for reduction to occur.

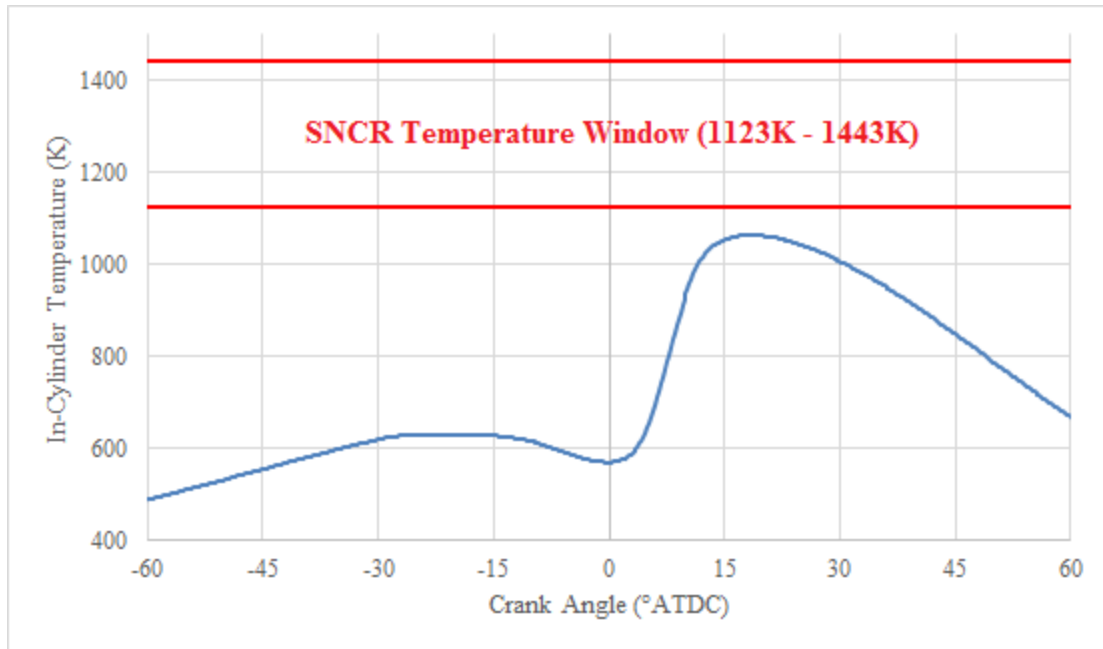


Figure 4.8 – Average in-cylinder temperature over the secondary injection window for the 80% load tests

#### 4.9 Oxygen Content

From studies found on the effect of oxygen content effect on SNCR, a minimum of 2% is required and optimal is between 12% and 15% [4]. The lowest oxygen content found in any of the tests performed was 14% and thus sufficient for optimal SNCR  $\text{NO}_x$  reduction.

#### 4.10 Residence Time

Studies on residence time show that based on the required temperature, residence time varies significantly. According to Willand et al., at the highest average temperatures achieved in this experiment, 1034 K or approximately 1000 K, the residence required for optimal  $\text{NO}_x$  reduction would be 1000+ msec [39]. At optimal temperatures like 1200 K to 1300 K required, the residence time would be approximately 10 msec to 100 msec. This indicates that again, reaching the desired temperature would allow for lower residence time. At 1500 rpm one stroke would be approximately 17 msec. These variances in required residence versus



temperature from Willand et al. show that the available residence time in this experiment require temperatures to be 1200 and 1300 K [39].

## **5 CONCLUSIONS, LESSONS LEARNED AND RECOMMENDATIONS**

### **5.1 Conclusions**

The ultimate goal of this experiment was to achieve and understand the SNCR of  $\text{NO}_x$  by direct secondary injection of aqueous urea. An 80-20 aqueous urea-glycerol mixture was used, and the glycerol was added in order to provide lubrication for the injector used in the secondary injection system. In addition to the 80-20 aqueous urea-glycerol mixture, 80-20 water-glycerol mixture and neat water were tested in order to determine the any effects from the glycerol and water. In the experiment, two loads were tested, 40% (5 N-m) and 80% (10 N-m) load, at 1500 rpm. At each load, four molar ratios (0.5, 1.0, 2.0 and 4.0) of reducing agent to  $\text{NO}_x$  were tested. In addition to the molar ratio, five different injection timings (30, 0, 10, 20 and 60 degrees ATDC) were tested.

There were several important factors focused on in order to achieve SNCR of  $\text{NO}_x$ , or in this case, lack thereof. These factors were molar ratio of reducing agent, injection timing, temperature window for reduction to occur, oxygen content of the exhaust, and residence time for the reactions to take place. Of these factors, only one was found to be insufficient for SNCR to take place, and that was the temperature window. According to studies related to temperature window, the optimal reaction of selective reduction occurs at 1123 to 1423 K [25]. Other studies confirm that the optimal temperature is 1250 K [25], [38], [43]. In the experiments, the highest average cylinder gas temperatures occurred at the 80% load tests. The maximum average in-cylinder temperature ( $T_{\text{cly}}$ ) based on the single zone model for the 40% load and 80% load tests were found to be 899 K and 1064 K, respectfully. These temperatures fall below the temperature window needed for SNCR to occur.

When testing for the SNCR of  $\text{NO}_x$  in diesel exhaust emissions with direct secondary injection of aqueous urea, the results for the 40% load showed no significant decrease in  $\text{NO}_x$  emissions when compared to baseline tests, but instead rather a maximum increase of 31% at the 4.0 molar ratio and 20° ATDC injection timing. In the 80% SNCR tests, no significant reduction or increase was observed. This increase in  $\text{NO}_x$  emissions and lack of reduction is believed to be from incomplete reduction reactions of the aqueous urea. The evaporative cooling and increased heat capacity from the water clearly showed a reduction in  $\text{NO}_x$  emissions, and the only explanation of the increase and lack of  $\text{NO}_x$  reduction indicates that the effect was counteracted by an increase on the  $\text{NO}_x$  formation from the addition of the urea. In the study by Kasuya et al., they discuss the effects of insufficient temperature being a failure to reduce  $\text{NO}_x$  and  $\text{NH}_3$  slip [43]. They also found that an increase of  $\text{NO}_x$ , from the urea, only occurred when temperatures exceeded the reaction window and caused the  $\text{NH}_3$  to oxidize to form additional  $\text{NO}_x$ . Based on the results of this experiment, the average  $T_{\text{cyl}}$  temperatures were too low and would have only allowed for  $\text{NH}_3$  slip to have occurred. Despite this, it was believed that due to the low temperatures a failure of the urea completely breaking down must have resulted in the increase of  $\text{NO}_x$  observed.

In the trials of the 80-20 water-glycerol tests, the 40% load tests yielded a maximum reduction of 44% and in the 80% load tests a maximum reduction of 59%. The neat water tests yielded a maximum reduction of  $\text{NO}_x$  in the 40% load test and 48% in the 80% load tests. Again, these results are believed to have been achieved purely by the evaporative cooling and added heat capacity of the water injected.

## **5.2 Lessons Learned**

In the carrying out of this experiment, a number of lessons were learned through the challenges faced. One lesson, in particular, was the issues with fouling injectors due to the injection of aqueous urea. In the experiment a number of injectors failed in the open position from what was believed to be urea crystallization and lack of lubricity. These failures continued despite the addition of glycerol, though failure occurred less frequently. The VW diesel injectors used were designed to deliver high pressure diesel fuel directly in-cylinder, not water or aqueous urea.

## **5.3 Recommendations**

Since the main shortcoming of this experiment was insignificant in-cylinder reduction of  $\text{NO}_x$  due to the low in-cylinder temperatures for SNCR to occur, it is recommended that continued studies in future focus on methods to increase the combustion and in-cylinder gas temperature. One method recommended is the addition of a turbo charger to the engine to increase in-cylinder pressure, temperature and BMEP. Another method to attempt to increase in-cylinder and overall engine temperature may be increasing exhaust pressure by introducing baffles in the exhaust plumbing, this was utilized in the SNCR study by William et al. [39].

In addition to equipment modification, another recommendation is to consider the possibility of an existing standardized emissions test. In this study, the experimental setup and nature of the experiment did not require the use of a pre-existing emissions test.

## WORKS CITED

1. Baukal, Charles. Everything You Need to Know About NO<sub>x</sub>. [Online] November 2005. <http://www.johnzink.com/wp-content/uploads/everything-about-nox.pdf>.
2. U.S. Energy Information Administration. INTERNATIONAL ENERGY OUTLOOK 2017. eia.com. [Online] September 14, 2017. [Cited: January 10, 2018.] <https://www.eia.gov/outlooks/archive/ieo17/>. #IEO2017.
3. 1066.1001 Definitions. U.S. Code of Federal Regulations Title 40 Part 1066. Washington D.C. : Office of the Federal Register National Archives and Records Administration, 2017.
4. The Selective Non-Catalytic Removal (SNCR) of Nitric Oxides From Engine Exhaust Streams: Comparison of Three Processes. Caton, Jerald A. and Xai, Zhiyong. College Station, TX : ASME, 2004, ASME Journal of Engineering for Gas Turbines and Power, Vol. 126, pp. 234-240.
5. EPA - United States Environmental Protection Agency. Emission Standards Reference Guide | All EPA Emission Standards. EPA.gov. [Online] April 27, 2017. [Cited: Aug 2018, 2018.] <https://www.epa.gov/emission-standards-reference-guide/all-epa-emission-standards>.
6. Mechanism and Modeling of Nitrogen Chemistry in Combustion. Miller, James A. and Bowman, T. Craig. 287-338, s.l. : Prog. Energy Combust. Sci, 1989, Vol. 15.
7. Reduction of Thermal and Prompt NO<sub>x</sub> In Exhausts of Natural Gas Fueled Boilers. May, Walter R. Houston, TX : SFA International, 2012.
8. Prompt NO Formation in flames: The Influence on NCN Thermochemistry. Goos, Elke; Sickfeld, Christina; Maub, Fabian; Seidel, Lars; Burcat, Alexander; Zeuch, Thomas 2013. Proceedings of the Combustion Institute. Vol. 34, pp. 657-666.
9. A Decade of On-road Emissions. Bishop, Gary A. and Stedman, Donald H. Denver, CO : Environmental Science and Technology, 2008, Vol. 42, pp. 1651-1656.
10. Pulkrabek, Willard W. Engineering Fundamentals of the Internal Combustion Engine. Upper Saddle River : Prentice Hall.
11. Reducing Particulate and NO<sub>x</sub> Using Multiple Injections and EGR in a Heavy Duty D.I. Diesel. Piermont, D. A., Montgomery, D. T. and Reitz, Rolf D. s.l. : SAE Technical Paper 950217, 1995.
12. Simultaneous Reduction of NO<sub>x</sub> and PM Emissions through Low Temperature EGR Cooling in Diesel Engines. Mehrotra, Aayush; Juttu, Simhachalam; Ravishankar, Siva S.; Ghodke, Rambhaji P.; Suryawanshi, J. G. s.l. : SAE Technical Paper 2014-01-2803, 2014.

13. Prediction of NO Reduction Rate Due to Port Water Injection in a DI Diesel Engine. Ishida, M., Ueki, H. and Sakaguchi, D. s.l. : SAE Technical Paper 972961, 1997.
14. Effects of Direct Water Injection on DI Diesel Engine Combustion. Bedford, F.; Rutland, C.; Dittrich, P.; Raab, A.; Wirbeleit, F. s.l. : SAE Technical Paper 200-01-2938, 2000.
15. NO<sub>x</sub> and PM emissions reduction on an automotive HSDI Diesel engine with waterindiesel emulsion and EGR: An experimental study. Mailboom, A. and Tauzia, X. 11, s.l. : Fuel, 2011, Vol. 90, pp. 3179-3192.
16. Physico-chemical properties of ethanol–diesel blend fuel and its effect on performance and emissions of diesel engines. Li, D.; Zhen, H.; Xingcai, L.; Wu-gao, Z.; Jian-guang, Yang Shanghai, China : Renewable Energy, 2004, Vol. 30, pp. 967-976.
17. Effect of cetane number improver on heat release rate and emissions of high speed diesel engine fueled with ethanol–diesel blend fuel. Xing-cai, L.; Jian-guang, Y.; Wu-gao, Z.; Zhen, H. Shanghai, China : Fuel, 2004, Vol. 83, pp. 2013-2020.
18. Neat fuel influence on biodiesel blend emissions. Thompson, G. J. and Nuszowski, J. Morgantown, WV : s.n., August 18, 2009, International Journal of Engine Research, Vol. 11, pp. 61-77.
19. Dual Fuel Natural Gas/Diesel Engines: Technology, Performance, and Emissions. Weaver, C. S. and Turner, S. H. s.l. : SAE Technical Paper 940548, 1994.
20. HCCI Operation of a Dual-Fuel Natural Gas Engine for Improved Fuel Efficiency and Ultra-Low NO<sub>x</sub> Emissions at Low to Moderate Engine Loads. Stanglmaier, R. H., Ryan, T. W. and Souder, J. S. s.l. : SAE Technical Paper 2001-01-1897, 2001.
21. The Use of NO<sub>x</sub> Adsorber Catalysts on Diesel Engines. Gill, L. J.; Twigg, M.; Twigg, M. V.; Walker, A. P. 1, s.l. : Topics in Catalysis, 2004, Vol. 28, pp. 157-164.
22. NO<sub>x</sub> Adsorber Performance In A LightDuty. West, B. H. and Sluder, C. S. s.l. : SAE Technical Paper 2000-01-2912, 2000.
23. HighEfficiency NO<sub>x</sub> and PM Exhaust Emission Control for HeavyDuty OnHighway Diesel Engines. Schenk, C., McDonald, J. and Olson, B. s.l. : SAE Technical Paper 2001-01-1351, 2001.
24. The Application of a NO<sub>x</sub> Absorber Catalyst System on a HeavyDuty Diesel Engine. Hinz, A.; Anderson, L.; Edvardsson, J.; Salomonsson, P.; Karlsson, C.; Antolini, F.; Blakeman, P.; Lavenius, M.; Magnusson, B.; Walker, A.; Chen, H. s.l. : SAE Technical Paper 2005-01-1084, 2005.

25. Lyon, Richard K. Method for the Reduction of the Concentration of NO in Combustion Effluents Using Ammonia. 3,900,554 U.S., Aug 19, 1975.
26. Combustion-Driven Flow Reactor Studies of Thermal DeNO<sub>x</sub> Reaction Kinetics. Kimball-Linne, M. A. and Hanson, R. K. Stanford, CA : Combustion and Flame, 1986, Vol. 64, pp. 337-351.
27. Bowman, Craig T. and Hanson, Ronald K. Investigation of Selective Non-Catalytic Process for In-Situ Reduction of NO<sub>x</sub> and CO Emissions from Marine Gas Turbines and Diesel Engines. Stanford, CA : High Temperature Gas Dynamics Laboratory, Mechanical Engineering Department Stanford University, 1997.
28. Thermal DeNO<sub>x</sub>. Lyon, Richard K. 3, Edison, NJ : Energy and Environmental Research Company, 1987, Environmental Science and Technology, Vol. 21, pp. 231-238.
29. Comparison of Nitric Oxide Removal by Cyanuric Acid and by Ammonia. Caton, J. A. and Siebers, D. L. 1989, Combustion Science and Technology, Vol. 65, pp. 277-293.
30. Arand, John K.; Verdes, Rancho Palos; Muzio, J. Lawrence; Niguel, Laguna; Sotter, John G.; Viejo, Mission Urea Reduction of NO<sub>x</sub> in Combustion Effluents. 4,204,386 U.S., June 17, 1980.
31. Decomposition of Urea into NH<sub>3</sub> for SCR Process. Yim, Sung Dae; Kim, Soo Jean; Baik, Joon Hyun; Nam, In-Sik; Mok, Young Sun; Lee, Jong-Hwan; Cho, Byong K.; Oh, Se H. s.l. : American Chemical Society, 2004, Industrial Engineering Chemical Research, Vol. 43, pp. 4856-4863.
32. A System of Selective Non Catalytic Reduction of NO<sub>x</sub> for Diesel Engine. Xu, Boyan; Tian, Haiying; Yang, Jie; Sun, Dezhi; Cai, Shaoli 2011, Advanced Materials Research, Vols. 201-203, pp. 643-646.
33. U.S. Department of Agriculture. USDA Forest Service: National Technology & Development Program. [Online] December 2008.  
<https://www.fs.fed.us/eng/pubs/pdf/08511816.pdf>. 5100—Fire Management, 0851 1816—SDTDC.
34. Reduction of Nitric Oxide in Diesel Exhaust With the Addition of Methylamine. Nakanishi, Y.; Yoshihara, Y.; Nishiwaki, K.; Tanaka, T. 1, 2003, JSME International Journal , Vols. Series B, Vol. 46.
35. Off-Highway Exhaust Gas After-Treatment: Combining Urea-SCR, Oxidation Catalysis and Traps. Hug, H. T., Mayer, A. and Hartenstein, A. s.l. : SAE Technical Paper 930363, 1993.
36. Numerical Simulation to Reduce NO<sub>x</sub> of Diesel Engine Urea-SCR System. Hui, Zhang, Boyan, Xu and Chauncheng, Wang. s.l. : Bentham Open, 2014, The Open Mechanical Engineering Journal, Vol. 8, pp. 643-647.

37. SNCR Application to Diesel Engine DeNO<sub>x</sub> under Combustion-driven Flow Reactor Conditions. Nam, C. H. and Gibbs, B. M. 2012, Journal of Environmental Sciences, pp. 769-778.
38. Diesel NO<sub>x</sub> Reduction with ammonium oxidizing agents directly injected in to the cylinder. Miyamoto, N.; Ogawa, H.; Wang, J.; Shudo, T.; Yamazaki, K. 1, 1995, International Journal of Vehicle Design, Vol. 16, pp. 71-79.
39. Selective Non-Catalytic NO<sub>x</sub>-Reduction in Diesel Engines Using Aqueous Urea. Willand, J.; Teigeler, M.; Wirbeleit, F.; Enderle, C.; Raab, A.; Bockhorn, H.; Schmitt, F. 1998, SAE Technical Paper 982651.
40. Application of Urea Based SNCR System in the Combustion Effluent Containing Low Level of Baseline Nitric Oxide. Hossain, K. A.; Mohd-Jaafar, M. N.; Appalanidu, K. B.; Mustafa, A.; Ani, F. N. 2005, Environmental Technology, Vol. 26, pp. 251-259.
41. Diesel Engine NO<sub>x</sub> Reduction by SNCR Under Simulated Flow Reactor Conditions. Nam, Chang-Mo, Kwon, Gihong and Mok, Youngsun. 3, s.l. : Korean Society of Environmental Engineers, 2006, Environmental Engineering Research, Vol. 11, pp. 149-155.
42. Numerical Evaluation of a New Strategy of Emissions Reduction by Urea Injection For Heavy Duty Diesel Engines. Golovitchev, Valeri I., Montorsi, Luca and Denbratt, Ingemar. 3, 2007, Engineering Applications of Computational Fluid Mechanics, Vol. 1, pp. 189-206.
43. The Thermal DeNO<sub>x</sub> Process; Influence of Partial Pressures and Temperature. Kasuya, Fumihiko; Glarborg, Peter; Johnsson, Jan E.; Dam-Johansen, Kim 9, Lyngby, Denmark : s.n., 1995, Chemical Engineering Science, Vol. 50, pp. 1455-1466.
44. Numerical Study on the Optimum Injection of Urea-Water Solution for SCR DeNO<sub>x</sub> Performance of a Heavy-Duty Diesel Engine to Improve DeNO<sub>x</sub> Performance and Reduce NH<sub>3</sub> Slip. Jeong, Soo-Jin, Lee, Sang-Jin and Kim, Woo-Seung. 7, s.l. : Mary Ann Lambert, Inc., 2008, Environmental Engineering Science, Vol. 25, pp. 1017-1035.
45. ISO - International Organization of Standardization. Diesel engines -- NO<sub>x</sub> reduction agent AUS 32 -- Part 4: Refilling interface. [Online] [Cited: July 1, 2016.] [http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=42941](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=42941). ISO 22241-4:2009.
46. MAXIMATOR AIR DRIVEN Liquid Pumps / Specifications. Maxpro Technologies, Inc.
47. NTK NO<sub>x</sub> Sensor / Module Application Guide. NTK. 2010.
48. 40 CFR Part 1065 - ENGINE-TESTING PROCEDURES. U.S. Code of Federal Regulations Title 40 Part 1065. Washington D.C. : Office of the Federal Register National Archives and Records Administration, 2017.



49. IPCC - The Intergovernmental Panel on Climate Change. Glossary - IPCC Procedures, the Synthesis Report. [Online] [Cited: Oct 12, 2015.] <http://www.ipcc.ch/>.

## APPENDIX

### Complete Sensor List

<b><u>Sensor Type</u></b>	<b><u>Data</u></b>	<b><u>Make</u></b>	<b><u>Model</u></b>	<b><u>Accuracy</u></b>
Encoder	Engine Speed (Combustion)	BEI Sensors	XH25D-SS-1440- ABZC-28V/V- EM18	100 kHz Threshold
Encoder / Hall Effect Position	Engine Speed (Dyno)	Cherry	GS100701	15 kHz Threshold
Load Cell	Dynamometer Torque	BLH Electronics	U3G1C	± 2%
Pressure Transducer	Engine Oil Pressure	VDO	360-081-030- 074C	± 3%
Thermocouple	Engine Oil Temperature	Omega	K-Type Thermocouple	± 0.75%
Thermocouple	Exhaust Temperature	Omega	K-Type Thermocouple	± 0.75%
Pressure Transducer / Thermistor	Ambient Air Pressure / Temperature	SparkFun - Weatherboard V3	BMP-085	± .01 % ± 2° C
Humidity Sensor	Relative Humidity	SparkFun - Weatherboard V3	SHT-15	± 2%
Pitot Tube	Intake Air Mass Flow	In-House	N/A	± 3%
Pressure Transducer	Secondary Injection Rail Pressure	VW	G247 / 06K906051	± 2%
Fuel Scale	Primary Fuel Mass	In-House	N/A	± 0.1%
Fuel Scale	Reductant Mass	In-House	N/A	± 0.4%
NO <sub>x</sub> Sensor	NO <sub>x</sub> ppm / O <sub>2</sub> %	Ford	DC3A-5J299-DC	± 2%
High Precision Pressure Transducer	In-Cylinder Pressure	PCB Piezotronics	112A05	± 0.3%